

**»multifix« series**

Centrifugal separators with a sintered filter element.

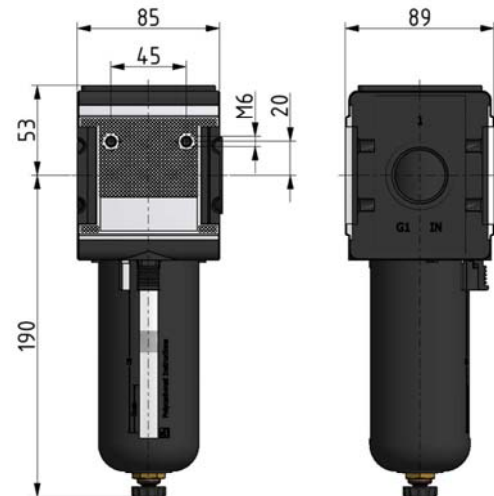
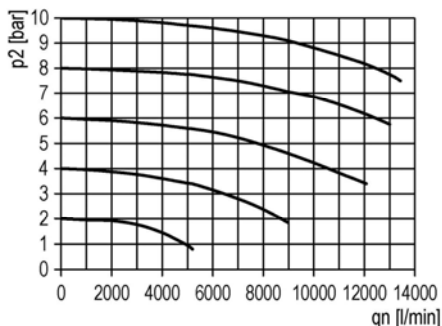
Max. medium temperature: 60 °C  
Max. ambient temperature: 60 °C  
Drain vale: Semi-automatic  
Flow rate measurement: At  $P_1 = 6$  bar and pressure drop  $\Delta p = 1$  bar

**Filter with polycarbonate bowl and bowl guard**

Art. No.	Type No.	Thread	Max. input pressure bar	Housing	Filter rating $\mu\text{m}$	Flow rate l/min	Size	DN
133112	F 45 S	G 1	16	Die-cast aluminium	5	7800	4	25

**Accessories / spare parts**

Art. No.	Type No.	Description
135858	ZW 45	Mounting bracket with 2 screws
135857	KP 45	Coupler pack for modular assembly of several devices
135859	KSS 45 F-HA	Polycarbonate bowl, Bowl guard with semi-automatic draining
135860	KSS 45 F-A	Polycarbonate bowl, Bowl guard with fully automatic draining
135861	MS 45 FS	Metal bowl with sight glass and semi-automatic draining
135862	MS 45 FS-A	Metal bowl with sight glass and fully automatic draining
100362	655.6.900	Automatic drain valve
100144	6141.6.905	Filter element 5 $\mu\text{m}$ , cellpor


**flow characteristic**

**symbol**
