

## Slides DA 5321, width 19.1 mm, up to 50 kg, Over-Extension

### Material:

Slide elements: Aluminium.  
Ball retainers and Balls: Stainless Steel.


Telescopic precision ball bearing slides for applications in the industrial and electronics sector.

- Hold-in in the closed position.
- Mounting bracket for electronic cabinets on request.
- Service life 40,000 cycles.
- Temperature range: -20°C to +70°C.



Accuride

Ordering Details: e.g.: Product No. 649 045 30, Slides DA 5321

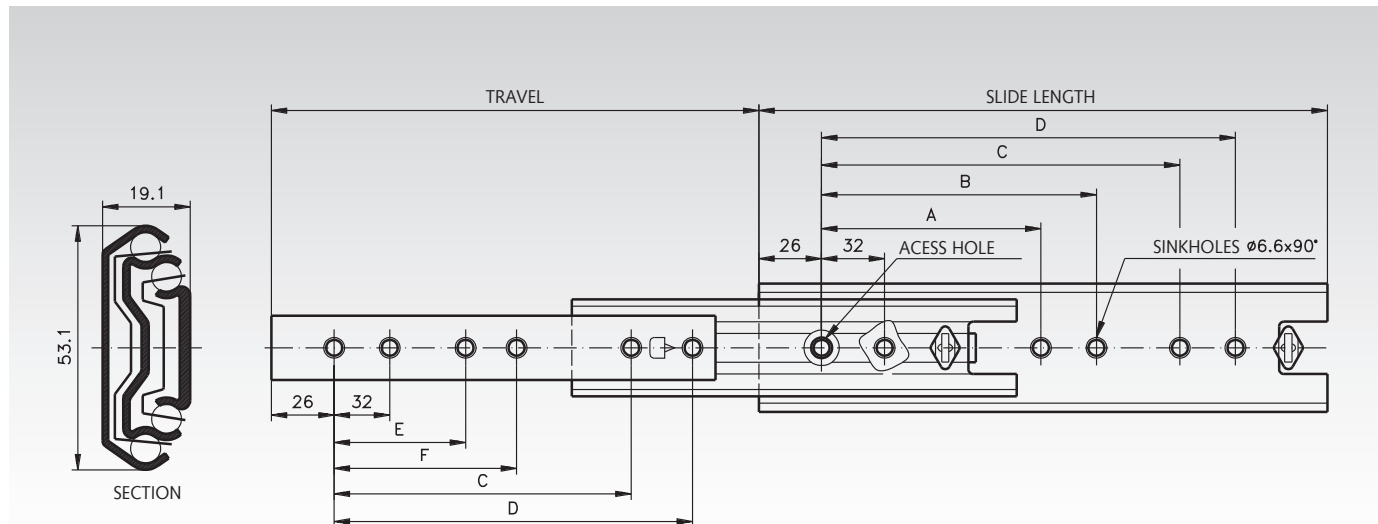

Product No. per Pair	Slide length mm	Travel +/-3.2 mm	A mm	B mm	C mm	D mm	E mm	F mm	Load Rating per Pair kg	Weight per Pair kg
649 045 30	300	324	-	-	192	224	-	-	40	0,72
649 045 35	350	374	-	-	224	256	-	-	43	0,86
649 045 40	400	424	160	192	288	320	128	160	45	0,98
649 045 45	450	474	160	192	320	352	128	160	48	1,11
649 045 50	500	524	192	224	384	416	160	192	50	1,24
649 045 55	550	574	192	224	416	448	160	192	50	1,37
649 045 60	600	624	256	288	480	512	192	256	50	1,50
649 045 65	650	674	256	288	544	576	192	256	50	1,62
649 045 70	700	724	288	320	576	608	256	288	50	1,76
649 045 80	790	804	352	384	672	704	320	352	40	2,00

### Note

Recommended fastening: M5 countersunk/ 6mm countersunk Euro screw.

Use all mounting positions to achieve the max. load rating.

Attention: Vertical (side) mounting only.

The load capacity was tested at a slide spacing of 450mm.

**Selection Tool**  
on the Internet at [www.maedler.de](http://www.maedler.de)  
in the section **MÄDLER®-Tools**