

Slides DS 3557, Width 12.7 mm, to 90 kg, Over Extension

Material: Stainless steel 1.4301.




Telescopic ball bearing slides for applications in the industrial and electronics sector.

- Locks in open position.
- Pinch free disconnect for easy drawer removal.
- Service life 10,000 cycles.
- Temperature range: -20°C to +70°C.



Ordering details: e.g.: Prod. No. 649 033 30, Slides DS 3557

Accuride

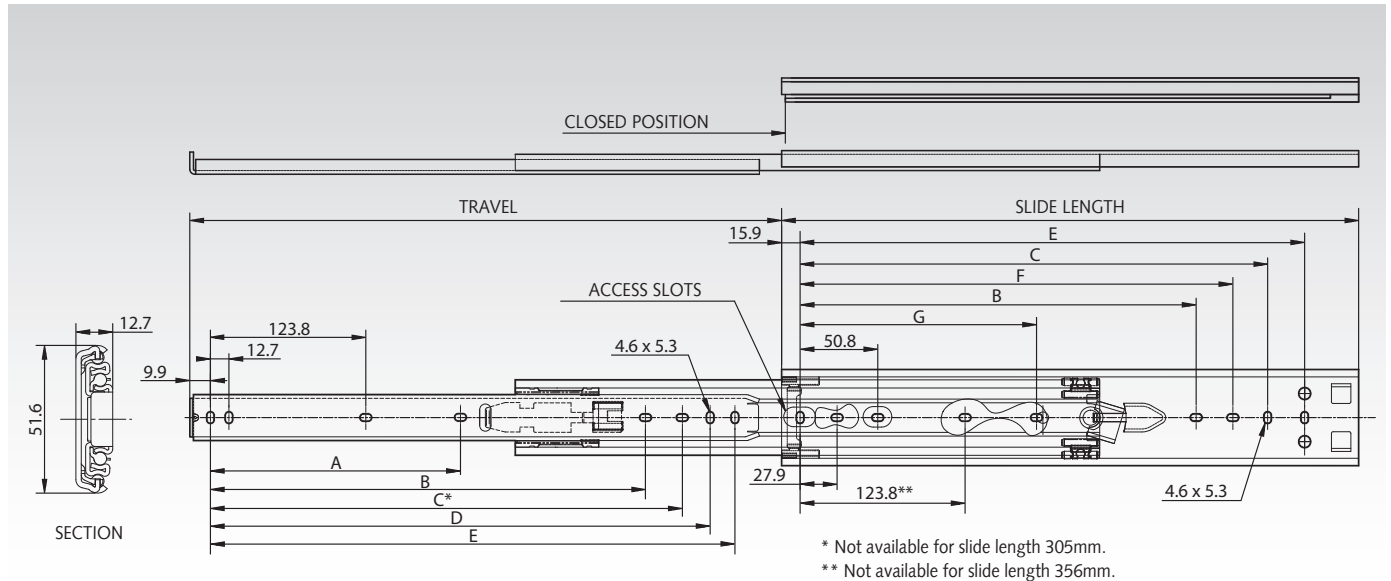

Product No. per Pair	Slide Length mm	Travel mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	Load Rating per Pair kg	Weight per Pair kg
649 033 30	305	330	-	-	235,0	247,7	260,4	209,6	-	56	1,4
649 033 35	356	381	-	-	285,8	298,5	311,2	260,4	-	68	1,6
649 033 40	406	432	-	-	336,6	349,3	362,0	311,2	-	80	1,8
649 033 45	457	483	177,8	314,4	387,4	400,1	412,8	362,0	-	85	2,0
649 033 50	508	533	203,2	365,3	438,2	450,9	463,6	412,8	-	90	2,2
649 033 55	559	584	228,6	416,1	489,0	501,7	514,4	463,6	228,6	90	2,5
649 033 60	610	635	254,0	466,9	539,8	552,5	565,2	514,4	254,0	90	2,7
649 033 65	660	686	279,4	517,7	590,6	603,3	616,0	565,2	279,4	87	2,9

Note

Recommended mounts: M4 screw.
Max. head height 2,5mm/Ø9,6mm.
Use all mounting positions to achieve the max. load rating.

For horizontally (flat) mounted slides the load bearing capacity is reduced to only 25% of the stated load rating.