


Hollow Worms and Worm Shafts Double-Thread, Right Hand

Double-threaded worms to be paired with double-threaded worm gears page 296. If the module (and number of threads) are match

various ratios at various axle distances can be realized (see table page 296).

Hollow Worms, Whirled, Made from Steel (C45), Double-Thread, Right Hand

Pressure angle 20°.

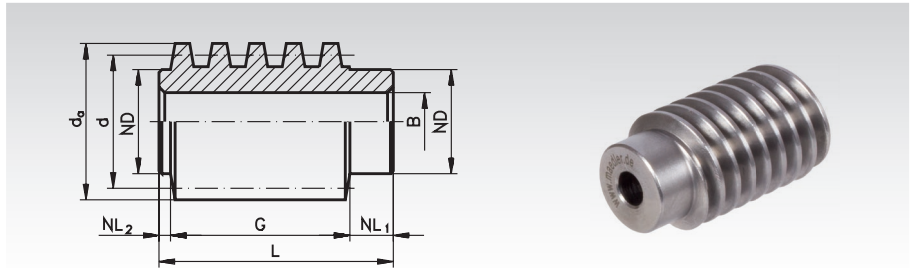


Ordering Details: e.g.: Product No. 310 200 00,
Worm, Steel, Module 3, Double-Thread, Right Hand

	Product No.	d mm	da mm	ND mm	NL ₁ mm	G mm	NL ₂ mm	L mm	B ^{H7} mm	Weight kg
Module 3.0	310 200 00	38	44	30	12	46	3	61	15	0,4
Module 4.0	310 500 00	50	58	40	15	62	4	81	20	1,2


Worm Shafts, Whirled, with Centring Hole, Made from Steel (C45), Double-Thread, Right Hand

Pressure angle 20°.

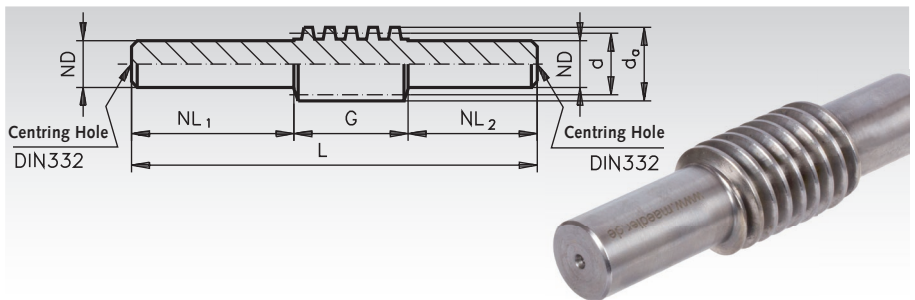

Ordering Details: e.g.: Product No. 310 201 00,
Worm Shaft, 11SMnPb30, Module 3, Double-Thread,
Right Hand

	Product No.	d mm	da mm	ND ^{+0,2 +0,4} mm	NL ₁ mm	G mm	NL ₂ mm	L mm	Weight kg
Module 3.0	310 201 00	38	44	30	130	46	90	266	1,6
Module 4.0	310 501 00	50	58	40	175	62	120	357	3,8



**Reworking within
24h-service possible.
Custom made parts
on request.**