


Slides DZ 7957, Width 19.1 mm, to 160 kg, Full Extension

Material:

Slide elements: Cold rolled steel, bright zinc-plated.
Ball retainers: Cold rolled steel, zinc-plated.
Balls: Hardened steel.


Telescopic precision ball bearing slides for applications in the industrial and electronics sector.

- Suitable for drawers up to 1000mm wide at high load.
- Fast Disconnect.
- Optional Clip-On Brackets (page 542).
- Very high service life up to 80,000 cycles.
- Temperature range: -20°C to +70°C.

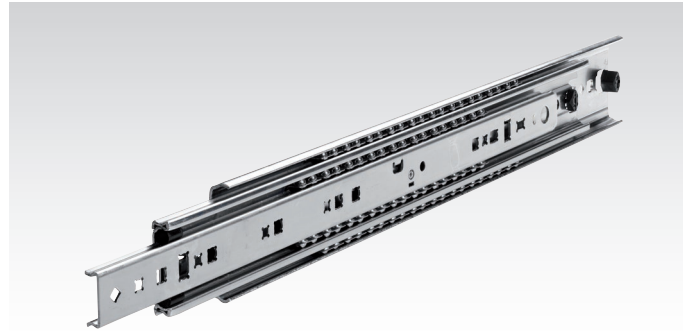

Accuride

Ordering details: e.g.: Prod. No. 649 039 12, Slides DZ 7957

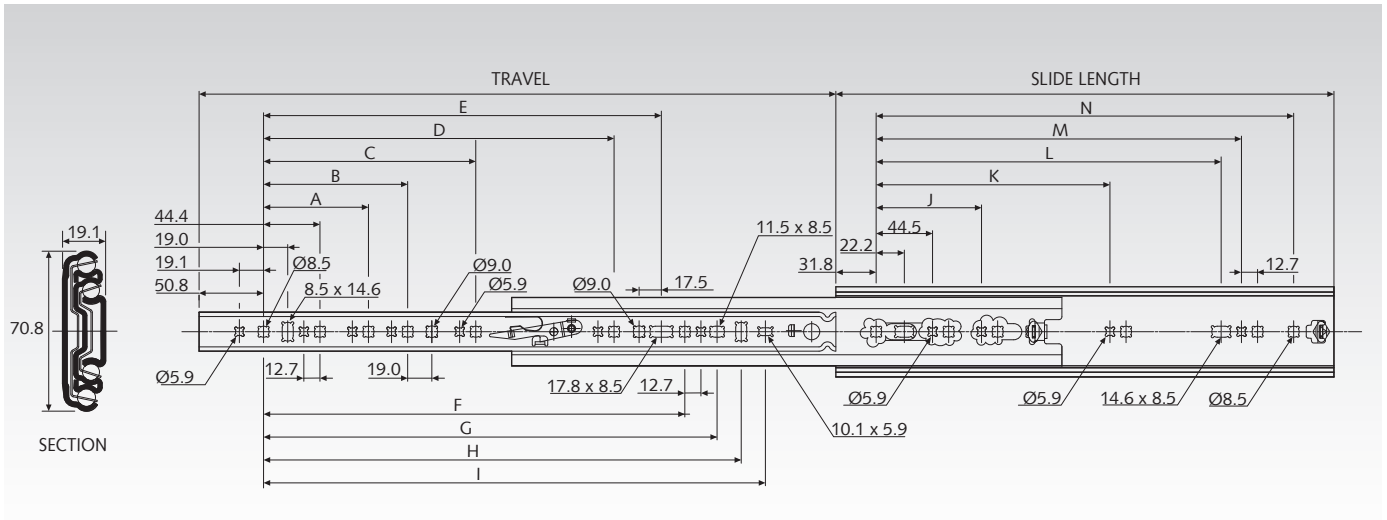

| Product No. per Pair | Slide Length mm | Travel +/-3.2 mm | A mm | B mm | C mm | D mm | E mm | F mm | G mm | H mm | I mm | J mm | K mm | L mm | M mm | N mm | Load Rating Pair kg | Weight Pair kg |
|----------------------|-----------------|------------------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|---------------------|----------------|
| 649 039 12 | 305 | 305 | - | - | - | - | - | - | - | 179,4 | 198,5 | - | - | 184,2 | 200,2 | 241,3 | 140 | 2,38 |
| 649 039 14 | 356 | 356 | - | - | - | - | - | - | - | 230,2 | 249,3 | - | - | 235,0 | 251,0 | 292,1 | 140 | 2,80 |
| 649 039 16 | 406 | 406 | 108 | - | - | - | - | 236,6 | 262,0 | 281,0 | 300,1 | - | - | 285,8 | 301,8 | 342,9 | 150 | 3,19 |
| 649 039 18 | 457 | 457 | 108 | - | - | - | - | 287,4 | 312,8 | 331,8 | 350,9 | - | - | 336,6 | 352,6 | 393,7 | 150 | 3,62 |
| 649 039 20 | 508 | 508 | 108 | 171,5 | - | - | - | 338,2 | 363,6 | 382,6 | 401,7 | - | - | 387,4 | 403,4 | 444,5 | 160 | 4,03 |
| 649 039 22 | 559 | 559 | 108 | 171,5 | - | - | 328,7 | 389,0 | 414,4 | 433,4 | 452,5 | - | - | 438,2 | 454,2 | 495,3 | 160 | 4,42 |
| 649 039 24 | 610 | 610 | 108 | 171,5 | - | - | 379,5 | 439,8 | 465,2 | 484,2 | 503,3 | - | - | 489,0 | 505,0 | 546,1 | 160 | 4,84 |
| 649 039 26 | 660 | 660 | 108 | 171,5 | - | - | 430,3 | 490,6 | 516,0 | 535,0 | 554,1 | - | - | 539,8 | 555,8 | 596,9 | 160 | 5,27 |
| 649 039 28 | 711 | 711 | 108 | 171,5 | - | - | 481,1 | 541,4 | 566,8 | 585,8 | 604,9 | - | - | 590,6 | 606,6 | 647,7 | 160 | 5,88 |
| 649 039 30 | 762 | 762 | 108 | 171,5 | - | - | 531,9 | 592,2 | 617,6 | 636,6 | 655,7 | 203,2 | 469,9 | 641,4 | 657,4 | 698,5 | 160 | 6,06 |
| 649 039 32 | 813 | 813 | 108 | 171,5 | - | - | 582,7 | 643,0 | 688,4 | 687,4 | 706,5 | 203,2 | 520,7 | 692,2 | 708,2 | 749,3 | 160 | 6,48 |
| 649 039 34 | 864 | 864 | 108 | 171,5 | 349,3 | - | 633,5 | 693,8 | 719,2 | 738,2 | 757,3 | 203,2 | 571,5 | 743,0 | 759,0 | 800,1 | 160 | 6,88 |
| 649 039 36 | 914 | 914 | 108 | 171,5 | 349,3 | 501,7 | 684,3 | 744,6 | 770,0 | 789,0 | 808,1 | 203,2 | 622,3 | 793,8 | 809,8 | 850,9 | 160 | 7,29 |

Note

Recommended mounts: M5/M6 screw.

Use all mounting positions to achieve the max. load rating.

Handed slide assembly: Levers for front disconnection move in same direction.

For bracket accessory kit see page 542. The fixings included will not fit the 7957 slide. We recommend M6 countersunk screws.

Selection Tool
on the Internet at www.maedler.de
in the section **MÄDLER®-Tools**