

Slides DZ 2642, Width 12.7 mm, to 45 kg, Compact Profile, Full Extension

Material:

Slide elements: Cold-rolled steel, bright zinc-plated.
Ball retainers: Cold-rolled steel, zinc-plated.
Balls: Hardened steel.


Telescopic ball bearing slides for applications in the industrial and electronics sector.

- Low slide profile.
- Groove or side mounting option.
- Hold-in in closed position.
- Very high service life 80,000 cycles.
- Temperature range: -20°C to +70°C.



Accuride

Ordering details: e.g.: Prod. No. 649 008 20, Slides DZ 2642

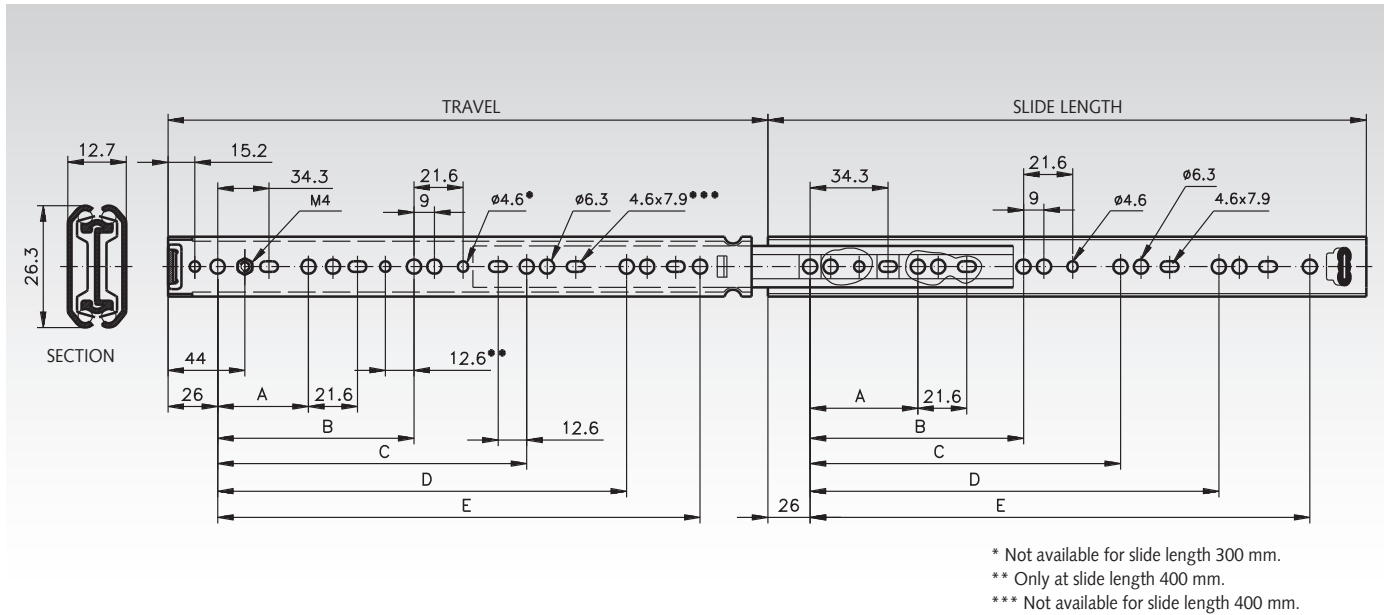

Product No. per Pair	Slide Length mm	Travel +/-3.2 mm	A mm	B mm	C mm	D mm	E mm	Load Rating per Pair kg	Weight per Pair kg
649 008 20	200	209	128	-	-	-	-	16	0,44
649 008 25	250	259	128	-	-	-	-	25	0,55
649 008 30	300	308	128	224	-	-	-	32	0,67
649 008 35	350	357	128	224	-	-	-	35	0,78
649 008 40	400	406	128	224	320	-	-	45	0,89
649 008 45	450	456	128	224	352	-	-	45	1,01
649 008 50	500	505	128	224	352	416	-	35	1,11
649 008 55	550	554	128	224	352	448	489	30	1,23

Note

Recommended mount: M4 screw/6mm Euro screw/4mm wood screw. Max. head. height 2mm/ Ø7.8mm.
Use all mounting positions to achieve the max. load rating.
Horizontal mounting is not recommended.



Hinges
Page 595