

Slides DZ 5321 EC, Width 19.1 mm, to 100 kg, Full Extension

Material:

Slide elements: Cold-rolled steel, bright zinc plated.
Ball retainers: Cold-rolled steel, zinc-plated.
Balls: Hardened steel.

Telescopic ball bearing slides for applications in the industrial and electronics sector.


- Self Close on the last 45mm of travel.
- Suitable for drawers up to 1000mm wide at high load.
- Service life 80,000 cycles.
- Temperature range: +10°C to +40°C. Storage: -20°C to +80°C.

Opening force 26N +/-5N.

Ordering details: e.g.: Prod. No. 649 037 40, Slides DZ 5321 EC



Accuride

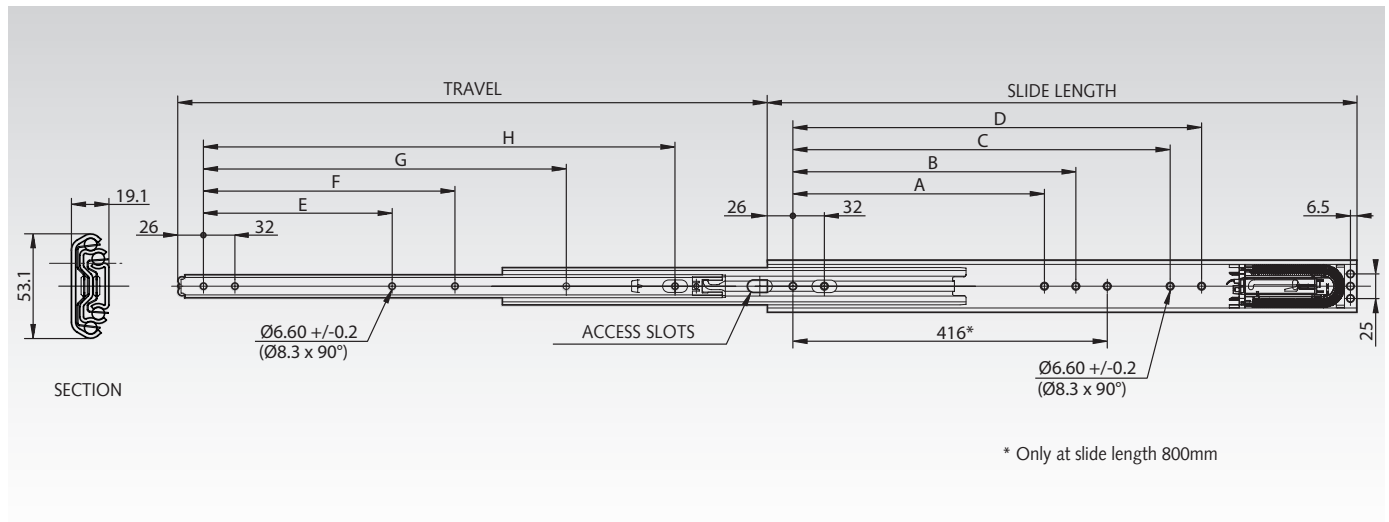

| Product No. per Pair | Slide Length mm | Travel mm | A mm | B mm | C mm | D mm | E mm | F mm | G mm | H mm | Load Rating ¹⁾ per Pair kg | Weight per Pair kg |
|----------------------|-----------------|-----------|------|------|------|------|------|------|------|------|---------------------------------------|--------------------|
| 649 037 40 | 400 | 388 | 160 | 192 | - | - | 128 | 160 | - | 288 | 65 / 55 | 1,99 |
| 649 037 45 | 450 | 450 | 160 | 192 | 256 | - | 128 | 160 | - | 320 | 65 / 55 | 2,27 |
| 649 037 50 | 500 | 500 | 192 | 224 | - | - | 160 | 192 | - | 384 | 70 / 60 | 2,57 |
| 649 037 55 | 550 | 550 | 192 | 224 | 320 | 352 | 160 | 192 | - | 416 | 85 / 72 | 2,87 |
| 649 037 60 | 600 | 600 | 256 | 288 | 384 | 416 | 192 | 256 | - | 480 | 100 / 85 | 3,18 |
| 649 037 70 | 700 | 700 | 288 | 320 | 448 | 480 | 256 | 288 | 512 | 576 | 100 / 85 | 3,79 |
| 649 037 80 | 800 | 800 | 352 | 384 | 576 | 608 | 320 | 352 | 416 | 672 | 90 / 75 | 4,42 |
| 649 037 90 | 900 | 900 | 320 | 352 | 544 | 672 | 320 | 448 | 736 | 768 | 85 / 70 | 4,96 |
| 649 037 99 | 1000 | 1000 | 352 | 384 | 640 | 768 | 352 | 384 | 704 | 736 | 80 / 65 | 5,56 |
| 649 037 11 | 1100 | 1100 | 416 | 448 | 768 | 800 | 416 | 448 | 544 | 960 | 75 / 60 | 6,18 |

¹⁾ Drawer width 450mm / 1000mm.

Note

Recommended mount: M5 countersunk / 6mm countersunk euro screw.

Use all mounting positions to achieve the max. load rating.

Optional clip-on brackets for bottom or platform mounting on request.

Attention: Vertical mounting only.