


Adjustable Clamping Levers 300, Version N with Internal Thread, Disengaged by Pulling

Material: Threaded bush and locking screw: steel 5.8, black oxidized.
Handle: zinc die-cast.
Plastic coating: black.

Modern industrial design. Easy to operate. Ideal wherever parts have to be clamped in confined spaces or in a particular lever position.

Pulling the lever upwards disengages the serrations, allowing the lever to be turned to the ideal clamping position. When the lever is released, the serrations automatically re-engage.

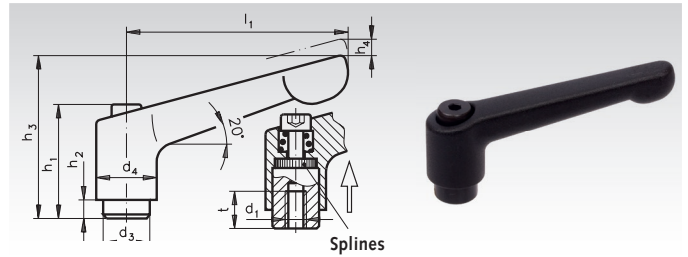

Ordering Details: e.g.: Product No. 665 720 00, Adjustable Clamping Lever 300, 30 mm, M4


Product No.	l ₁ mm	d ₁ mm	d ₃ mm	d ₄ mm	h ₁ mm	h ₂ mm	h ₃ mm	h ₄ mm	t mm	Weight g
665 720 00	30	M4	10	13	24,5	4	31	3,5	7	27
665 722 00	30	M5	10	13	24,5	4	31	3,5	7	27
665 724 00	45	M4	10	13	24,5	4	35	3,5	8	34
665 726 00	45	M5	10	13	24,5	4	35	3,5	8	34
665 728 00	63	M6	13,5	17,5	31	6,5	45	4	10	76
665 730 00	63	M8	13,5	17,5	31	6,5	45	4	10	74
665 731 00	78	M8	16	21	36	8	55	4	14	123
665 733 00	78	M10	16	21	36	8	55	4	14	119
665 734 00	92	M10	19	24	43	11	65	4	17	194
665 736 00	92	M12	19	24	43	11	65	4	17	171
665 738 00	108	M16	23	30	50,5	12	76	5	23	289

Adjustable Clamping Levers 300, Version G with external Thread, disengaged by pulling

Material: Screw insert and locking screw: Steel 5.8., black oxidized.
Handle: zinc diecast.
Plastic coating: black.

Modern industrial design. Easy to operate. Ideal wherever parts have to be clamped in confined spaces or in a particular lever position.

The insert is connected to the lever via serrations. Pulling the lever upwards disengages the serrations, allowing the lever to be turned to the ideal clamping position. When the lever is released, the serrations automatically re-engage.

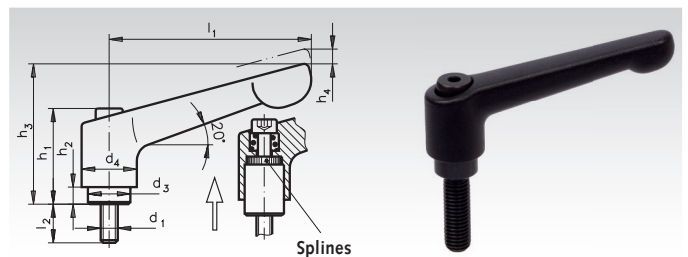

Ordering Details: e.g.: Product No. 665 775 08, Adjustable Clamping Lever 300, 30 mm, M4

Product No.	l ₁ mm	l ₂ mm	d ₁ mm	d ₃ mm	d ₄ mm	h ₁ mm	h ₂ mm	h ₃ mm	h ₄ mm	Weight g
665 775 08	30	12	M4	10	13	24,5	4	31	3,5	28
665 775 09	30	20	M4	10	13	24,5	4	31	3,5	28
665 775 10	30	12	M5	10	13	24,5	4	31	3,5	29
665 775 11	30	20	M5	10	13	24,5	4	31	3,5	29
665 775 12	45	12	M5	10	13	24,5	4	35	3,5	36
665 775 16	45	16	M5	10	13	24,5	4	35	3,5	36
665 775 20	45	20	M5	10	13	24,5	4	35	3,5	36
665 775 25	45	25	M5	10	13	24,5	4	35	3,5	37
665 775 32	45	32	M5	10	13	24,5	4	35	3,5	38
665 776 16	45	16	M6	10	13	24,5	4	35	3,5	37
665 776 20	45	20	M6	10	13	24,5	4	35	3,5	37
665 776 25	45	25	M6	10	13	24,5	4	35	3,5	38
665 776 32	45	32	M6	10	13	24,5	4	35	3,5	40
665 776 40	45	40	M6	10	13	24,5	4	35	3,5	41
665 778 10	63	20	M6	13,5	17,5	31	6,5	45	4	81
665 778 16	63	32	M6	13,5	17,5	31	6,5	45	4	83
665 778 20	63	20	M8	13,5	17,5	31	6,5	45	4	84
665 778 25	63	25	M8	13,5	17,5	31	6,5	45	4	86
665 778 32	63	32	M8	13,5	17,5	31	6,5	45	4	88
665 778 40	63	40	M8	13,5	17,5	31	6,5	45	4	91
665 780 20	78	20	M10	16	21	36	8	55	4	139
665 780 25	78	25	M10	16	21	36	8	55	4	141
665 780 32	78	32	M10	16	21	36	8	55	4	142
665 780 40	78	40	M10	16	21	36	8	55	4	146
665 780 50	78	50	M10	16	21	36	8	55	4	152
665 780 63	78	63	M10	16	21	36	8	55	4	159
665 782 32	92	32	M12	19	24	43	11	65	4	217
665 782 40	92	40	M12	19	24	43	11	65	4	222
665 782 50	92	50	M12	19	24	43	11	65	4	229
665 782 63	92	63	M12	19	24	43	11	65	4	239

On request, the adjustable clamping levers 300 can also be supplied with stainless-steel insert 1.4305.