


HTD Pulleys Profile 5M

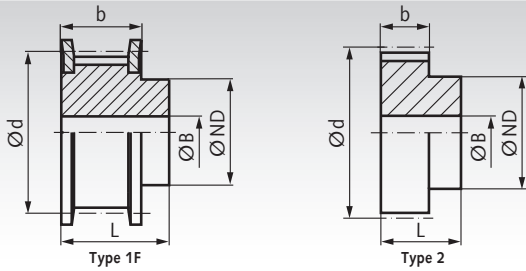


Material: Up to a Teeth Number of 72 steel, phosphated.
From a Teeth Number of 44 aluminium similar to EN AW2017A.

These HTD pulleys are manufactured pitch-true with special cutters. This leads to a precise meshing of teeth.

Ordering Details: e.g.: Product No. 172 412 00, Pulleys, Pitch 5 mm, 12 Teeth, Timing Belt Width 25 mm

Profile 5M, Timing Belt Width 25 mm

Product No. Belt Width 25mm	Number of teeth	Type	Outside-Ø		d mm	ND mm	b mm	L mm	Pilot Hole B mm	Custom Bore B max. mm	Weight g
			Pulley mm	Flange mm							
172 412 00	12	1F	17,95	23	19,10	12,5	30,5	36	6	8	50
172 414 00	14	1F	21,14	25	22,28	13,5	30,5	36	6	9	80
172 415 00	15	1F	22,73	28	23,87	16	30,5	36	6	10	90
172 416 00	16	1F	24,32	28	25,46	16,5	30,5	36	6	11	110
172 417 00	17	1F	25,91	32	27,06	18	30,5	36	6	12	
172 418 00	18	1F	27,50	32	28,65	20	30,5	36	6	13	130
172 420 00	20	1F	30,69	36	31,83	23	30,5	36	6	14	170
172 421 00	21	1F	32,28	38	33,42	24	30,5	38	6	14	200
172 422 00	22	1F	33,87	38	35,01	25,5	30,5	38	6	15	220
172 424 00	24	1F	37,05	42	38,20	27	30,5	38	6	16	260
172 425 00	25	1F	38,64	44	39,79	28,5	30,5	38	6	17	
172 426 00	26	1F	40,24	44	41,38	30	30,5	38	6	18	320
172 428 00	28	1F	43,42	48	44,56	30,5	30,5	38	6	18	370
172 430 00	30	1F	46,60	51	47,75	35	30,5	38	6	21	440
172 432 00	32	1F	49,79	54	50,93	38	30,5	38	8	23	480
172 434 00	34	1F	52,97	60	54,11	38	30,5	38	8	23	
172 436 00	36	1F	56,15	60	57,30	38	30,5	38	8	23	590
172 440 00	40	1F	62,52	71	63,66	38	30,5	38	8	23	750
172 444 00	44	2	68,88	-	70,03	38	30,5	40	8	23	310
172 448 00	48	2	75,25	-	76,39	38	30,5	40	8	23	370
172 452 00	52	2	81,62	-	82,76	45	30,5	40	8	28	
172 460 00	60	2	94,35	-	95,49	50	30,5	40	8	30	600
172 472 00	72	2	113,45	-	114,59	50	30,5	40	8	30	850
172 480 00	80	2	126,18	-	127,32	60	30,5	40	10	38	
172 490 00	90	2	142,10	-	143,24	75	30,5	40	10	50	



**Reworking within
24h-service possible.
Custom made parts
on request.**