


Cabinet "U" Handles 525

Material: Plastic Duroplast PF31, black glossy finish, flash mark thoroughly polished.

A special feature is that the flash mark on this handle is not visible nor can it be felt. The large tube diameter and the brass threaded bush lead to an immense rigidity.

Temperature resistant up to 110°C.

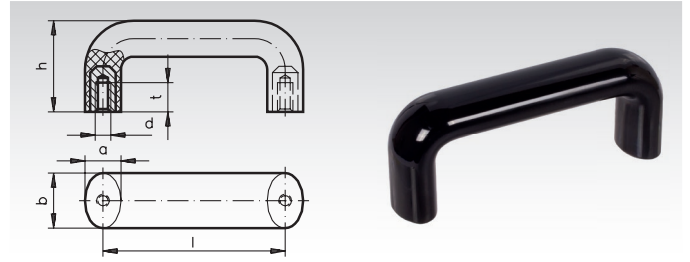

Ordering Details: e.g.: Product No. 666 601 00, Cabinet "U" Handle 525, 86 mm


Product No.	Length l mm	a mm	b mm	d mm	h mm	t mm	Weight g
666 601 00	86±0,5	17	26	M6	43	12	85
666 602 00	117±0,5	20	30	M8	54	13	138
666 603 00	179±1	20	30	M8	62	13	185

Cabinet "U" Handles 725 Made from Polypropylene or Polyamide

Material:

Version Plastic PP: Thermoplast Polypropylene, glass-fibre reinforced, black, matt.
Cost efficient. Temperature resistant up to 100°C.

Version Plastic PA HT: Thermoplast Polyamide, glass-fibre reinforced, black, matt.
Temperature resistant up to 200° C.

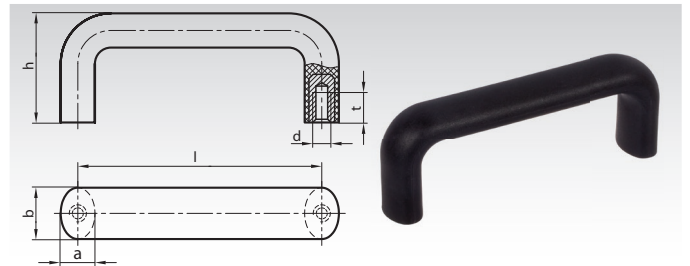

Ordering Details: e.g.: Product No. 666 601 01, Cabinet "U" Handle 725 PP, 86 mm

Product No. PP	Product No. PA HT	Length l mm	a mm	b mm	d mm	h mm	t mm	Weight g
666 601 01	666 602 01	86±0,5	14	23	M6	44	12	46
666 601 02	666 602 02	117±0,5	15	25	M6	49	12	69
666 601 03	666 602 03	117±0,5	15	25	M8	49	13	69
666 601 04	-	120±0,5	15	25	M8	49	13	74
666 601 05	-	132±0,5	16	26	M8	54	13	83
666 601 06	-	150±1	16	27	M8	56	13	95
666 601 07	666 602 07	179±1	16	27	M8	57	13	108
666 601 08	-	300±1	20	32	M10	64	17	205


Cabinet "U" Handles 528 Made from Polypropylene or Polyamide

Material:

Version Plastic PP: Thermoplast Polypropylene, glass-fibre reinforced, black, matt.
Cost efficient. Temperature resistant up to 100°C.

Version Plastic PA: Thermoplast Polyamide, glass-fibre reinforced, black, matt.
Temperature resistant up to 150° C.

Cabinet handles 528 are mounted from the operating side with socket-head cap screws.

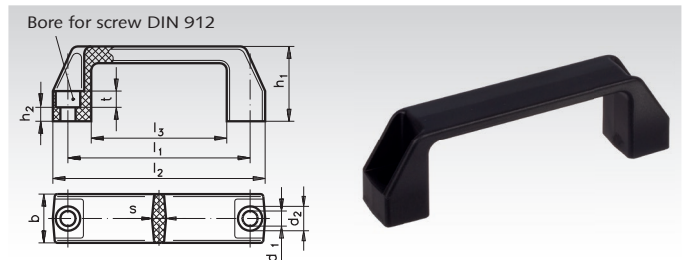

Ordering Details: e.g.: Product No. 666 540 00, Cabinet "U" Handle 528 PP, 94 mm

Product No. PP	Product No. PA	Length l ₁ mm	b mm	d ₁ mm	d ₂ mm	h ₁ mm	h ₂ mm	l ₂ mm	l ₃ mm	s mm	t mm	Weight g
666 540 00	666 530 00	94 ⁻¹	21	6,5	10,5	38	6	109	74	6	7,0	26
666 542 00	666 532 00	117±1	26	8,5	13,5	41	6,5	137	93	7	8,5	44
666 544 00	666 534 00	132±1	27	8,5	13,5	45	7,5	150	108	7	8,5	47
666 546 00	666 536 00	179±1	28	8,5	13,5	50	8,5	196	151	7,5	8,5	70
666 548 00	666 538 00	235±1	30	10,5	16,5	54	9,5	260	201	8,5	10,5	118