


## Adaptors for Standard and Safety Quick-Release Couplings

### Adaptors with Internal Thread for Standard and Safety Quick-Release Couplings

**Material:** Carbonated steel, with corrosion- proof treatment.  
 Internal diameter: 7.2 mm/7.4 mm.  
 Operating pressure: 2 - 12 bar.  
 Max. operating pressure: 16 bar.  
 Precision: constant dimensions.  
 Hardness: wear resistant.

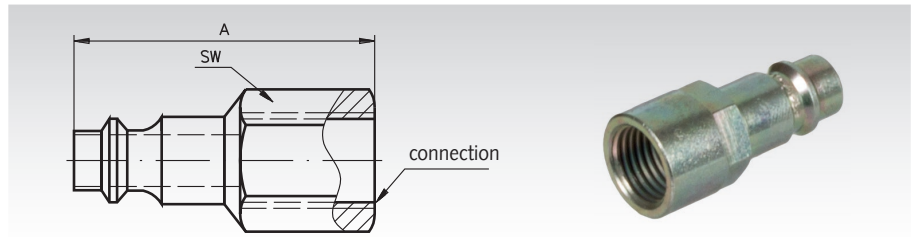


Ordering details: e.g.: Prod.-No., Type, Size

Product No.	Connection	A mm	SW mm	Weight g
870 330 14	G 1/4	40	20	21
870 330 38	G 3/8	42	21	39
870 330 12	G 1/2	46	25	56

### Adaptors with External Thread for Standard and Safety Quick-Release Couplings

**Material:** Carbonated steel, with corrosion- proof treatment.  
 Internal diameter: 7.2 mm/7.4 mm.  
 Operating pressure: 2 - 12 bar.  
 Max. operating pressure: 16 bar.  
 Precision: constant dimensions.  
 Hardness: wear resistant.

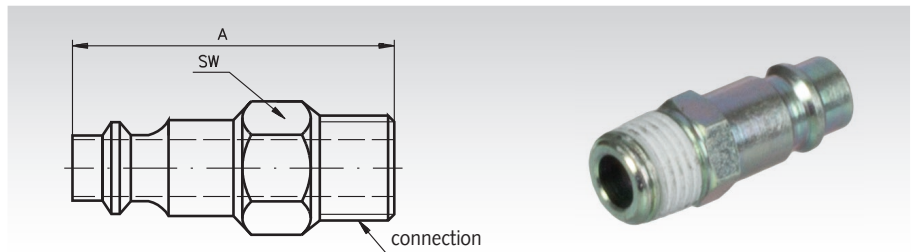


Ordering details: e.g.: Prod.-No., Type, Size

Product No.	Connection	A mm	SW mm	Weight g
870 332 14	G 1/4	35	15	19
870 332 38	G 3/8	41	17	31
870 332 12	G 1/2	49	22	62

### Adaptors with Hose Connector for Standard and Safety Quick-Release Couplings

**Material:** Carbonated steel, with corrosion- proof treatment.  
 Internal diameter: 7.2 mm/7.4 mm.  
 Operating pressure: 2 - 12 bar.  
 Max. operating pressure: 16 bar.  
 Precision: constant dimensions.  
 Hardness: wear resistant.

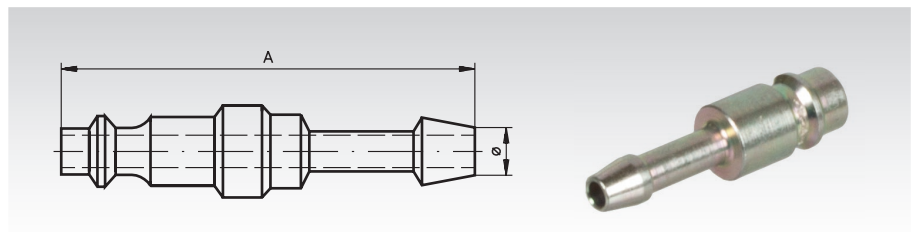

Ordering details: e.g.: Prod.-No., Type, Size

Product No.	Connection Ø mm	A mm	Weight g
870 346 00	6	45	14
870 348 00	8	46	17
870 349 00	9	54	25
870 350 00	10	46	19
870 353 00	13	52	26