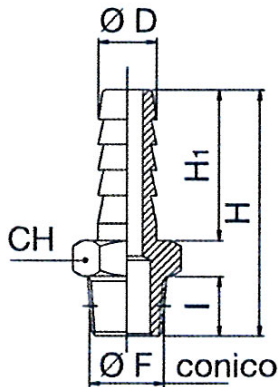


**Male hose fittings**

Nickel-plated brass, »value line« Series

 Max. operating pressure           60,0 bar  
 Max. operating temperature       150 °C


239.107-E

**Male hose fitting, conical male thread**

| Art. No. | Type No.  | D    | F     | I    | H    | H1   | CH |
|----------|-----------|------|-------|------|------|------|----|
| 115587   | 239.101-E | 6.0  | R 1/8 | 8.0  | 31.5 | 19.0 | 12 |
| 115588   | 239.102-E | 8.0  | R 1/8 | 8.0  | 31.5 | 19.0 | 12 |
| 115589   | 239.103-E | 9.0  | R 1/8 | 8.0  | 31.5 | 19.0 | 12 |
| 115590   | 239.104-E | 10.0 | R 1/8 | 8.0  | 32.5 | 20.0 | 12 |
| 115591   | 239.105-E | 6.0  | R 1/4 | 11.0 | 35.0 | 19.0 | 14 |
| 115592   | 239.106-E | 8.0  | R 1/4 | 11.0 | 35.0 | 19.0 | 14 |
| 115593   | 239.107-E | 9.0  | R 1/4 | 11.0 | 35.0 | 19.0 | 14 |
| 115594   | 239.108-E | 10.0 | R 1/4 | 11.0 | 36.0 | 20.0 | 14 |
| 115595   | 239.109-E | 12.0 | R 1/4 | 11.0 | 36.0 | 20.0 | 14 |
| 115596   | 239.110-E | 9.0  | R 3/8 | 11.5 | 35.5 | 19.0 | 17 |
| 115597   | 239.111-E | 10.0 | R 3/8 | 11.5 | 36.5 | 20.0 | 17 |
| 115598   | 239.112-E | 12.0 | R 3/8 | 11.5 | 36.5 | 20.0 | 17 |
| 115599   | 239.113-E | 9.0  | R 1/2 | 14.0 | 38.5 | 19.0 | 22 |
| 115600   | 239.114-E | 10.0 | R 1/2 | 14.0 | 39.5 | 20.0 | 22 |
| 115601   | 239.115-E | 12.0 | R 1/2 | 14.0 | 39.5 | 20.0 | 22 |