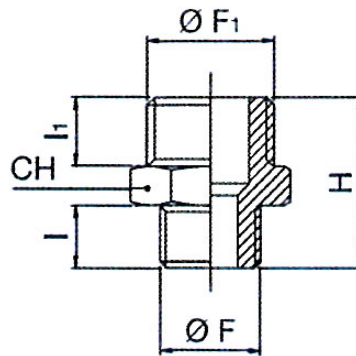



Standard screw fittings

Nickel-plated brass, »value line« Series

 Max. operating pressure 60,0 bar
 Max. operating temperature 150 °C


252.62-E

Double nipple

Art. No.	Type No.	F	F1	I	I1	H	CH
115667	252.31-E	M5	M5	4.0	4.0	11.5	8
115668	252.33-E	G 1/8	G 1/8	6.0	6.0	16.5	14
115669	252.34-E	G 1/8	G 1/4	6.0	8.0	19.0	17
115670	252.61-E	G 1/4	G 1/4	8.0	8.0	21.0	17
115671	252.62-E	G 1/4	G 3/8	8.0	9.0	22.0	19
115672	252.63-E	G 1/4	G 1/2	8.0	10.0	23.5	24
115673	252.64-E	G 3/8	G 3/8	9.0	9.0	23.0	19
115674	252.65-E	G 3/8	G 1/2	9.0	10.0	24.5	24
115675	252.66-E	G 1/2	G 1/2	10.0	10.0	25.5	24