


Suitable for domestic water services, heating and air conditioning plants or compressed air systems.
Not suitable for steam.

Housing	Nickel-plated brass
Head piece	Nickel-plated brass
Screen	Stainless steel
Sealant	NBR O-ring
Standard thread	G thread acc. to ISO 228-1, tolerance class B
Max. operating pressure	20 bar
Operating temperature	-20 °C to 110 °C



60-3 N

Dirt strainer, sieve insert stainless steel, mesh width 0.5 mm


Art. No.	Type No.	Thread	DN	C mm	L mm	a/f 1 mm	a/f 2 mm	Mesh width mm
140994	60-1 N	G 1/4	8	40.0	55.0	18	20	0.5
137836	60-2 N	G 3/8	10	40.0	55.0	21	20	0.5
140995	60-3 N	G 1/2	15	40.0	58.0	25	20	0.5
140996	60-4 N	G 3/4	20	48.0	70.0	31	27	0.5
140997	60-5 N	G 1	25	56.0	87.0	38	32	0.5
140998	60-6 N	G 1 1/4	32	64.0	96.0	47	36	0.5
140999	60-7 N	G 1 1/2	40	73.0	106.0	54	38	0.5
141000	60-8 N	G 2	50	88.5	126.0	67	46	0.5

Dirt strainer, sieve insert stainless steel, mesh width 0.3 mm

Art. No.	Type No.	Thread	DN	C mm	L mm	a/f 1 mm	a/f 2 mm	Mesh width mm
141001	60-1 N-0,3	G 1/4	8	40.0	55.0	18	20	0.3
141002	60-2 N-0,3	G 3/8	10	40.0	55.0	21	20	0.3
141003	60-3 N-0,3	G 1/2	15	40.0	58.0	25	20	0.3
141004	60-4 N-0,3	G 3/4	20	48.0	70.0	31	27	0.3
141005	60-5 N-0,3	G 1	25	56.0	87.0	38	32	0.3
141006	60-6 N-0,3	G 1 1/4	32	64.0	96.0	47	36	0.3
141007	60-7 N-0,3	G 1 1/2	40	73.0	106.0	54	38	0.3
141008	60-8 N-0,3	G 2	50	88.5	126.0	67	46	0.3

Dirt strainer, sieve insert stainless steel, mesh width 0.05 mm

Art. No.	Type No.	Thread	DN	C mm	L mm	a/f 1 mm	a/f 2 mm	Mesh width mm
141009	60-1 N-0,05	G 1/4	8	40.0	55.0	18	20	0.05
141010	60-2 N-0,05	G 3/8	10	40.0	55.0	21	20	0.05
141011	60-3 N-0,05	G 1/2	15	40.0	58.0	25	20	0.05
141012	60-4 N-0,05	G 3/4	20	48.0	70.0	31	27	0.05
141013	60-5 N-0,05	G 1	25	56.0	87.0	38	32	0.05
141014	60-6 N-0,05	G 1 1/4	32	64.0	96.0	47	36	0.05
141015	60-7 N-0,05	G 1 1/2	40	73.0	106.0	54	38	0.05
141016	60-8 N-0,05	G 2	50	88.5	126.0	67	46	0.05



Replacement screen for brass strainers, mesh width 0.5 mm

Art. No.	Type No.	Description	A mm	B mm
105696	62 M	For port size G 1/4, G 3/8, G 1/2	18.0	32.0
105697	63 M	For port size G 3/4	24.0	41.0
105698	64 M	For port size G 1	30.0	47.0
105699	65 M	For port size G 1 1/4	36.0	50.0
105700	66 M	For port size G 1 1/2	42.0	57.0
105701	67 M	For port size G 2	53.0	70.0



62 M

Replacement screen for brass strainers, mesh width 0.3 mm

Art. No.	Type No.	Description	A mm	B mm
141032	62 M-0,3	For port size G 1/4, G 3/8, G 1/2	18.0	32.0
141033	63 M-0,3	For port size G 3/4	24.0	41.0
141034	64 M-0,3	For port size G 1	30.0	47.0
141035	65 M-0,3	For port size G 1 1/4	36.0	50.0
141036	66 M-0,3	For port size G 1 1/2	42.0	57.0
141037	67 M-0,3	For port size G 2	53.0	70.0



62 M-0,3


Replacement screen for brass strainers, mesh width 0.05 mm

Art. No.	Type No.	Description	A mm	B mm
141020	62 M-0,05	For port size G 1/4, G 3/8, G 1/2	18.0	32.0
141021	63 M-0,05	For port size G 3/4	24.0	41.0
141022	64 M-0,05	For port size G 1	30.0	47.0
141023	65 M-0,05	For port size G 1 1/4	36.0	50.0
141024	66 M-0,05	For port size G 1 1/2	42.0	57.0
141025	67 M-0,05	For port size G 2	53.0	70.0




62 M-0,05

FLOW RATE AND PRESSURE DROP CHART WITH WATER

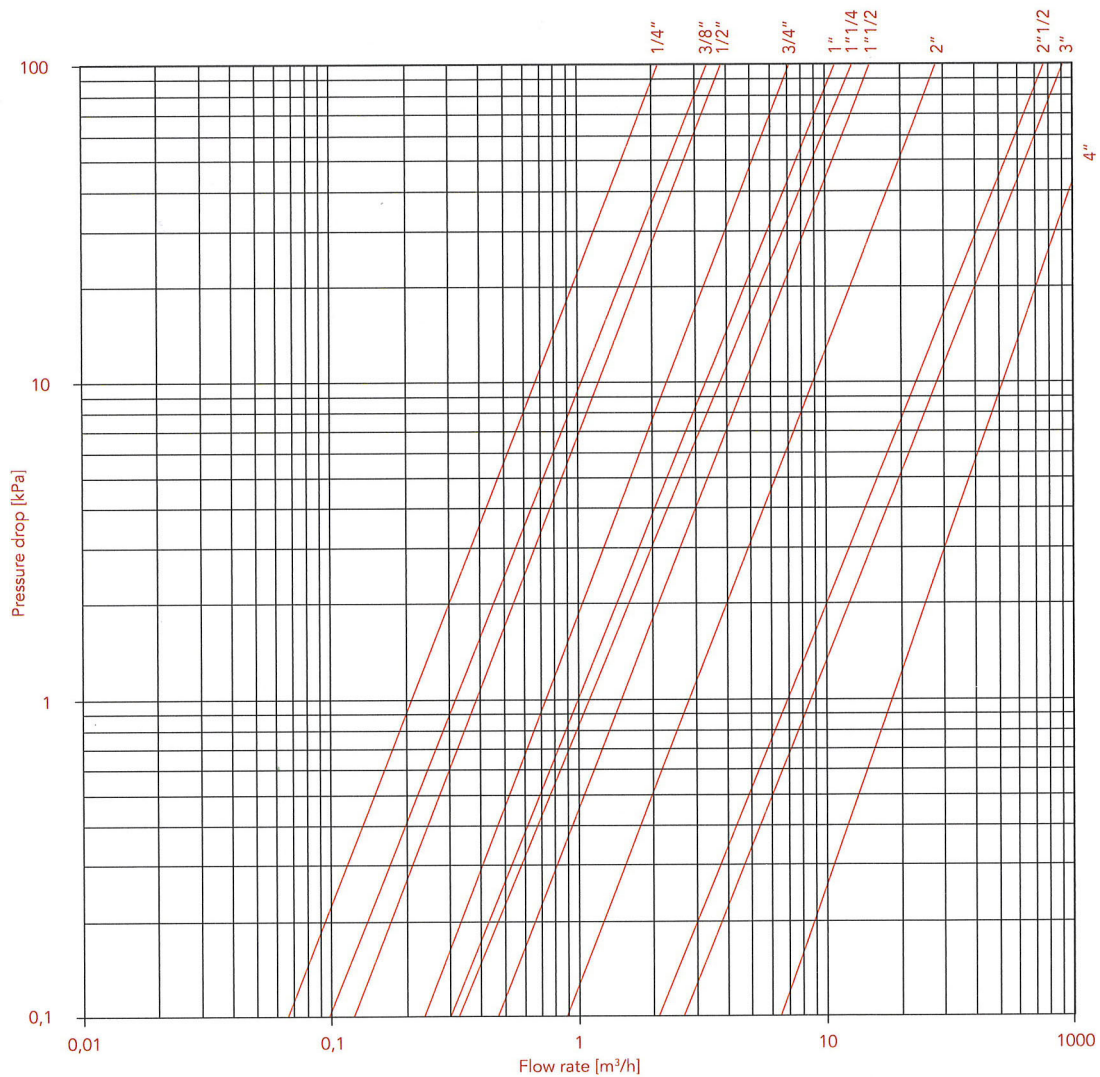

SIZE	1/4"	3/8"	1/2"	3/4"	1"	1"1/4"	1"1/2"	2"	2"1/2"	3"	4"
Kv	2,20	3,40	3,80	7,20	11	13	15	28	77	93	146

PRESSURE-TEMPERATURE DIAGRAM

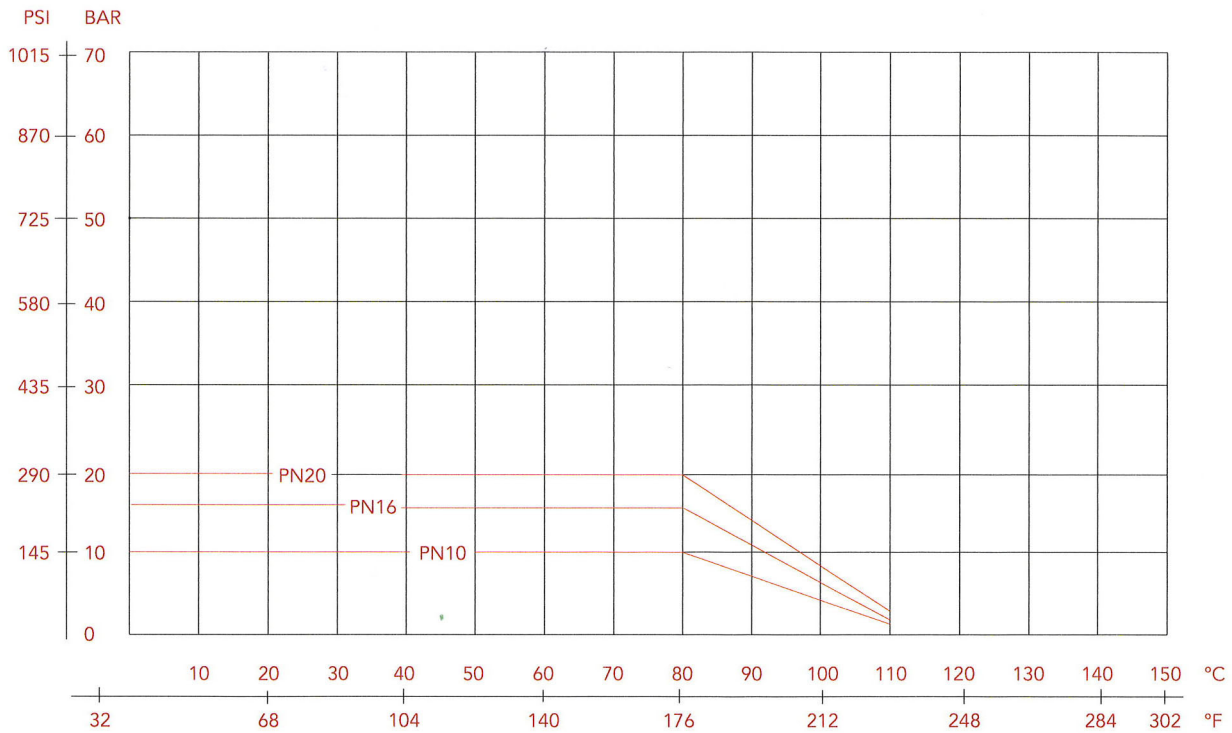

The values shown by the dropping lines state the maximum limit of employment of the valves.
 The shown valves are approximate.