


- Adjustable with knurled screw -

For regulation of a cylinder piston speed at both ends and control of flow rates.

Designed as a banjo-type valve with a hollow bolt and ring piece for mounting directly.

On the version with a knurled screw, the set volumetric flow rate can be locked with the hexagon nut to obtain a fixed setting.



Operating pressure:

Temperature range:

Hollow bolt, pivoting arm, adjusting screw:

Valve trim:

Lip seal, O-ring:

Captive seals:

Max. 10 bar


0 °C to +70 °C

Nickel-plated brass

Brass with a bare metal surface

NBR

Polyamide (glass fibre-reinforced)

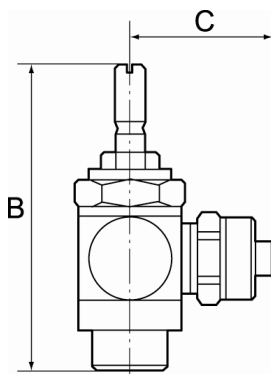

338.005-4



338.014-6

Bidirectional flow control valves, air restriction at both ends (»B«), plug-in connector

Type No.	Art. No.	Thread	For pipe mm	a/f mm	B mm	C mm
338.005-4	107002	M5	4	8	38.9	18.6
338.018-4	107003	G 1/8	4	14	42.0	20.6
338.018-6	107004	G 1/8	6	14	42.0	22.7
338.018-8	107005	G 1/8	8	14	42.0	23.7
338.014-6	107006	G 1/4	6	17	51.0	24.2
338.014-8	107007	G 1/4	8	17	51.0	24.7
338.014-10	107008	G 1/4	10	17	51.0	26.8