

Die cast aluminium nickel-plated, standard type.

For blowing out and cleaning machines, workpieces, bore holes, hollow parts, etc.

Max. operating pressure	10 bar
Working pressure	2 - 6 bar
Temperature range	-10 °C to 50 °C
Connecting thread	G 1/4
Nozzles	M12x1.25
Extension nozzles	M12x1.25
Material	Die cast aluminium ZL 104 nickel-plated
Air consumption	250 l/min at 6 bar

Blow gun with standard nozzle, bore 1.5 mm

Art. No.	Type No.	Type of connection
114320	22 A	Stem, I.D. 6
114321	22 B	Stem, I.D. 9
114322	22 C	Stem, I.D. 13
117445	22 K/TD	G 1/4 IT
114323	22 K	Push-in plug for DN 7.2 couplings



22 A

Blow gun with silencer nozzle

Art. No.	Type No.	Type of connection
114324	22 A/D	Stem, I.D. 6
114325	22 B/D	Stem, I.D. 9
114326	22 C/D	Stem, I.D. 13
137734	22 V/D	G 1/4 IT
114327	22 K/D	Push-in plug for DN 7.2 couplings



22 A/D

Blow gun with chip shield (to prevent eye injuries from flyaway chip debris)

Art. No.	Type No.	Type of connection
114328	22 A-S	Stem, I.D. 6
114329	22 B-S	Stem, I.D. 9
114330	22 C-S	Stem, I.D. 13
137735	22 V-S	G 1/4 IT
114331	22 K-S	Push-in plug for DN 7.2 couplings



22 A-S

Standard type without nozzle!

In combination with the safety nozzles described below, this blow gun meets a wide range of safety requirements.

Blow gun without nozzle

Art. No.	Type No.	Type of connection
114332	22 A-KD	Stem, I.D. 6
114333	22 B-KD	Stem, I.D. 9
114334	22 C-KD	Stem, I.D. 13
117444	22 K/T	G 1/4 IT
114335	22 K-KD	Push-in plug for DN 7.2 couplings



22 A-KD

Extension tube (without nozzle) for use with safety nozzles standard type

Art. No.	Type No.	Designation	Material
114336	22.150-S	Extension tube straight, 150 mm	Aluminium
114337	22.300-S	Extension tube straight, 300 mm	Aluminium
114338	22.600-S	Extension tube straight, 600 mm	Aluminium
114339	22.900-S	Extension tube straight, 900 mm	Aluminium
114340	22.150-SG	Extension tube bent, 150 mm	Aluminium
114341	22.300-SG	Extension tube bent, 300 mm	Aluminium
114342	22.600-SG	Extension tube bent, 600 mm	Aluminium
114343	22.900-SG	Extension tube bent, 900 mm	Aluminium



If correctly designed, these noise-reducing nozzles guarantee a lower noise level than conventional one-hole types with an identical blowing force.

They are usually fitted with a noise-reducing plastic insert and they are recommended by the German BGIA (Institute for Occupational Safety and Health).

Low-noise fine-spray nozzle, M12x1.25 connection

Art. No.	Type No.	Material	Length mm	Nozzle O.D. mm	Diagram
114354	22.101	Nickel-plated steel, brass	45.0	10	1
114355	22.102	Nickel-plated steel, brass	45.0	10	2

Low-noise round nozzle, M12x1.25 connection

Art. No.	Type No.	Material	Length mm	Nozzle O.D. mm	Diagram
114356	22.201	Aluminium	55.0	11	3
114357	22.202	Aluminium	50.0	10	4
114358	22.203	Aluminium	41.0	13	5
114359	22.204	Die-cast zinc	46.0	17	6
114360	22.205	Plastic (POM)	41.0	17	7
114361	22.206	Aluminium	35.0	11	8
114362	22.207	Die-cast-zinc	47.0	19	9
114363	22.208	Plastic (ABS)	55.0	19	10

Low-noise flat nozzle, M12x1.25 connection


Art. No.	Type No.	Material	Length mm	Nozzle width mm	Diagram
114364	22.401	Nickel-plated brass	100.0	21.5	11
114365	22.402	Nickel-plated brass	100.0	29.0	12
114366	22.403	Nickel-plated brass	100.0	21.0	13

⇒ For noise, air consumption and blowing force values, see diagrams 1-17 on the following pages.



Adapter for the use of safety nozzles with connection M12x1.25 with »Typhoon« blow gun						
Art. No.	Type No.	Male	Female	L1 mm	L2 mm	a/f mm
114446	29.22	1/2" – 27 UNS	M12x1.25	25.0	9.0	17

Adapter for the use of safety nozzles G 1/4 with »Typhoon« blow gun and aluminium blow gun						
Art. No.	Type No.	Male	Female	L1 mm	L2 mm	a/f mm
133177	29.14	1/2" – 27 UNS	G 1/4	25.0	9.0	17
133178	22.14	M12x1.25	G 1/4	26.0	10.0	-

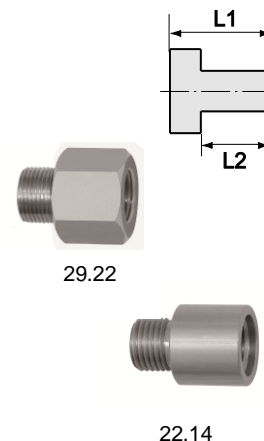

Nozzles suitable for all aluminium and die-cast aluminium nickel-plated blow guns.

Standard nozzle with Ø 1.5 mm bore, M12x1.25 connection			
Art. No.	Type No.	Material	Description
114344	105/5	Aluminium	With a central bore, a sharp beam with high blowing force, noise level above 90 dB(A), at pressures of 4 bar


Silencer nozzle, M12x1.25 connection			
Art. No.	Type No.	Material	Description
114345	106/6	Aluminium	With sintered metal insert, extremely low noise, noise consistently below 70 dB(A), wide beam with low air blowing force

Nozzle with chip shield, M12x1.25 connection		
Art. No.	Type No.	Material
114346	107/6	Aluminium



Extension nozzles for blowing out inaccessible points directly.

Extension nozzles, nozzle bore 3.0 mm, nickel-plated brass		
Art. No.	Type No.	Nozzle type
114347	22/100	100 mm long, angled
114348	22/150	150 mm long, angled
114349	22/250	250 mm long, angled
114350	23/100	100 mm long, straight
114351	23/150	150 mm long, straight
114352	23/250	250 mm long, straight
114353	23/400	400 mm long, straight

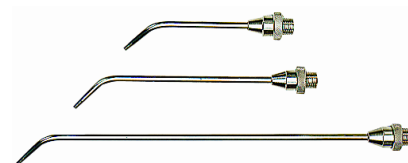

Air flow nozzle regulates the air flow and reduces the pressure by turning the nozzle ring.

Extension nozzles, nozzle bore 3.0 mm, nickel-plated brass		
Art. No.	Type No.	Material
114367	109/44	Aluminium / POM



Noise table for safety nozzles

Compared to standard one-hole types

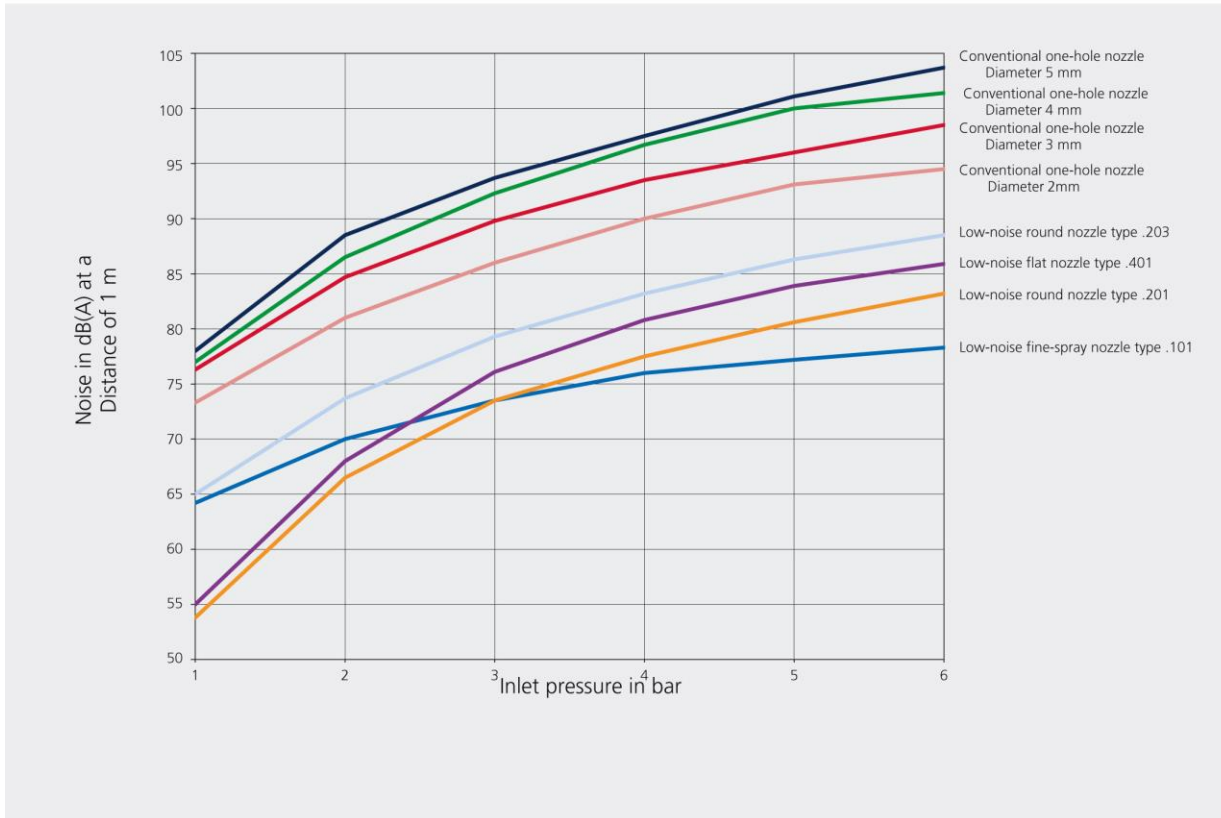


Diagram safety nozzles



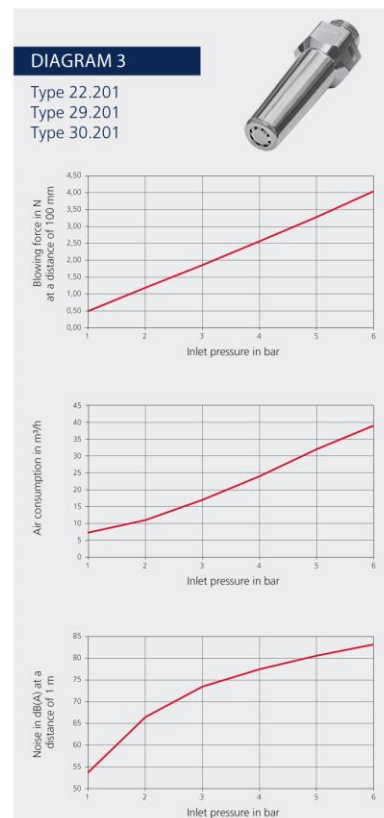


Diagram safety nozzles

DIAGRAM 4

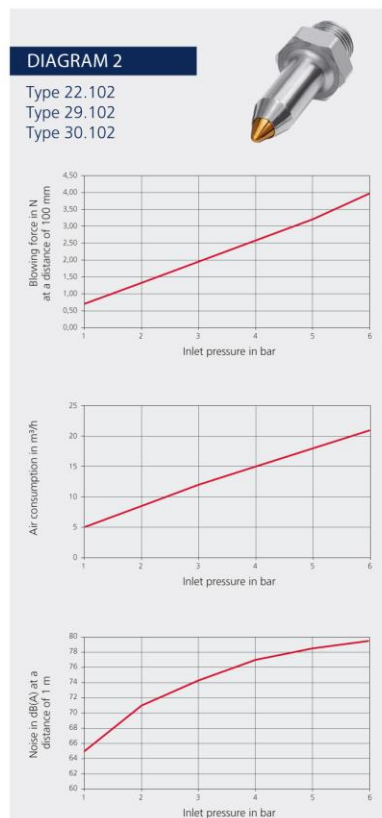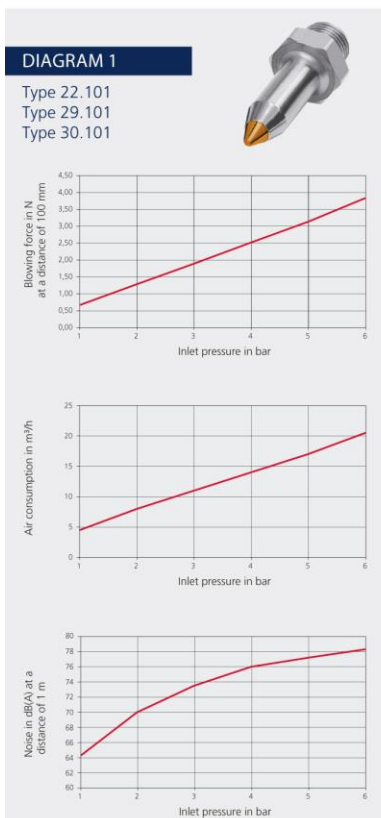

Type 22.202
Type 29.202
Type 30.202

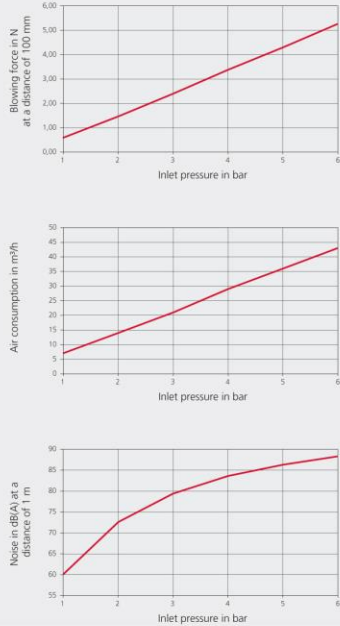


DIAGRAM 5



Type 22.203
Type 29.203
Type 30.203

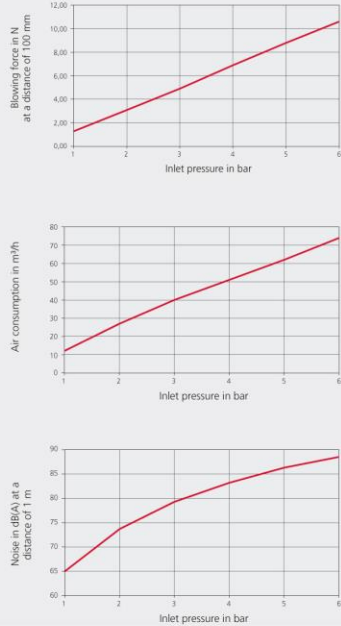


DIAGRAM 6



Type 22.204
Type 30.204

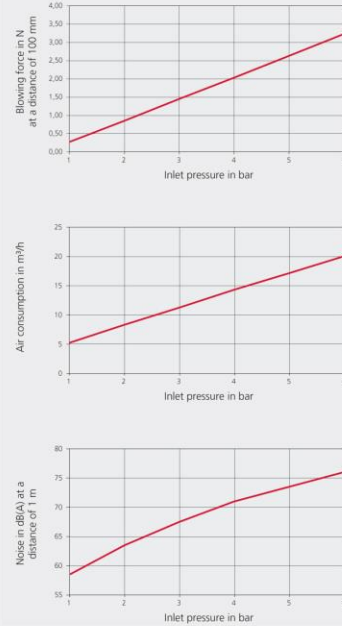


DIAGRAM 7



Type 22.205
Type 30.205

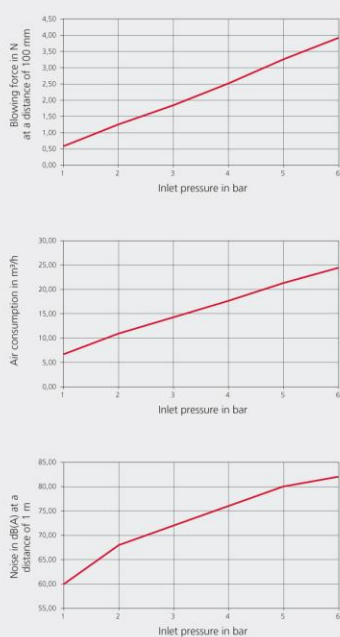


DIAGRAM 8



Type 22.206
Type 29.206
Type 30.206

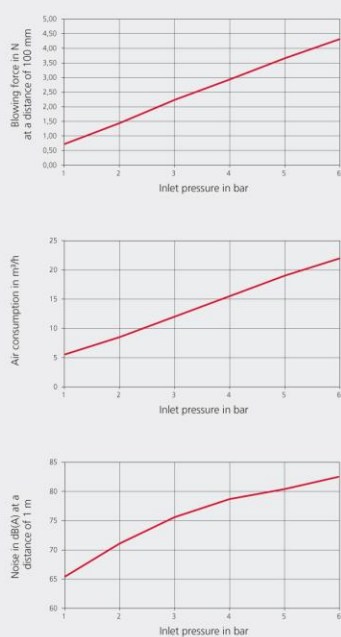


DIAGRAM 9



Type 22.207
Type 30.207

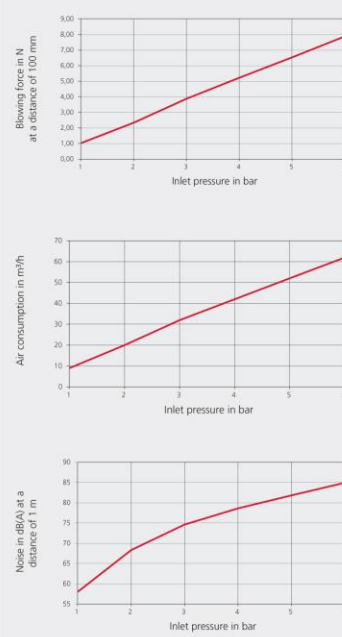


Diagram safety nozzles

DIAGRAM 10

Type 22.208
Type 30.208

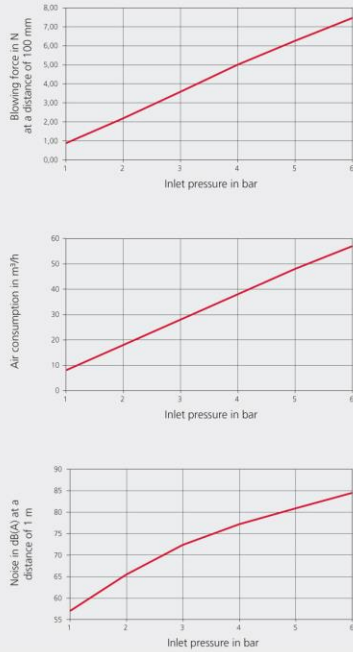


DIAGRAM 11

Type 22.401
Type 29.401
Type 30.401

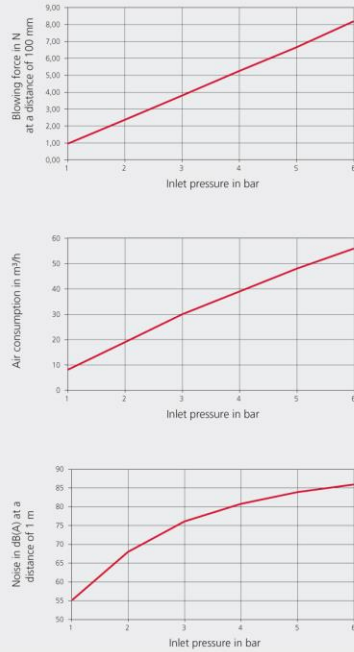


DIAGRAM 12

Type 22.402
Type 29.402
Type 30.402

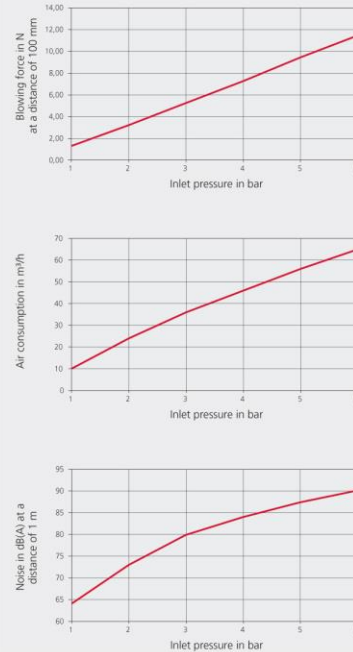


DIAGRAM 13

Type 22.403
Type 29.403
Type 30.404

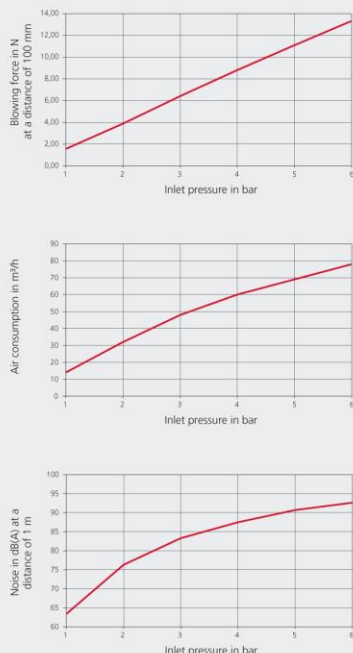


DIAGRAM 14

Type 30.403

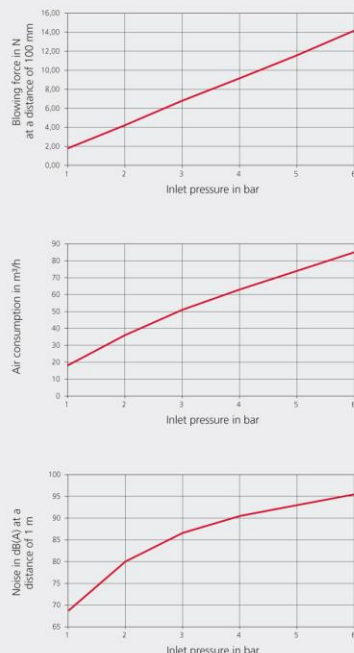


DIAGRAM 15

Type 30.405

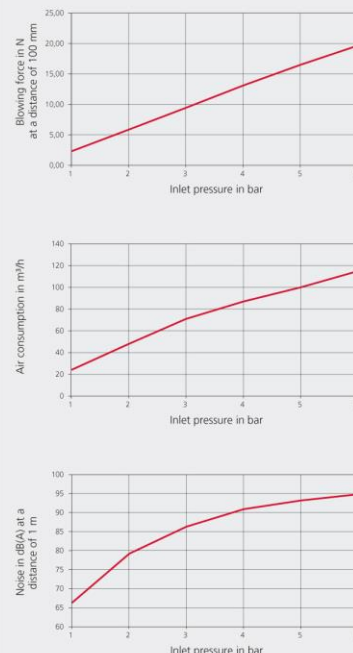


Diagram safety nozzles

DIAGRAM 16



Type 31.101






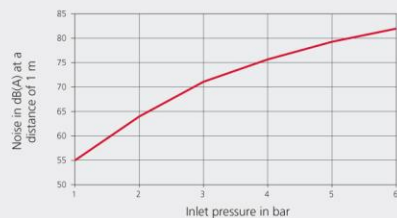




DIAGRAM 17

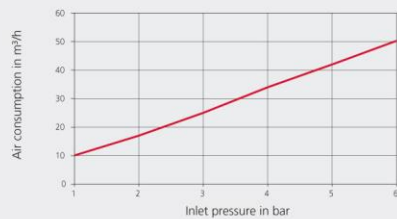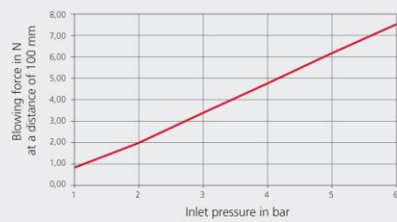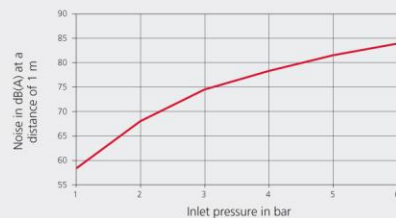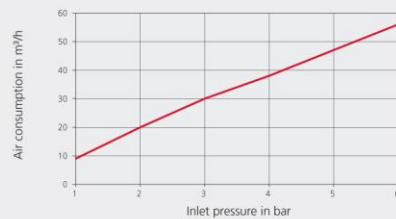


Type 31.102


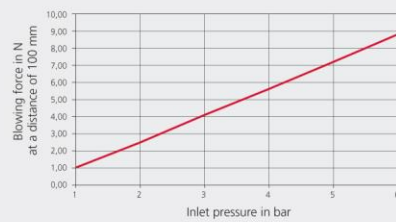


Flow rates for Standard nozzles Art. No. 114344

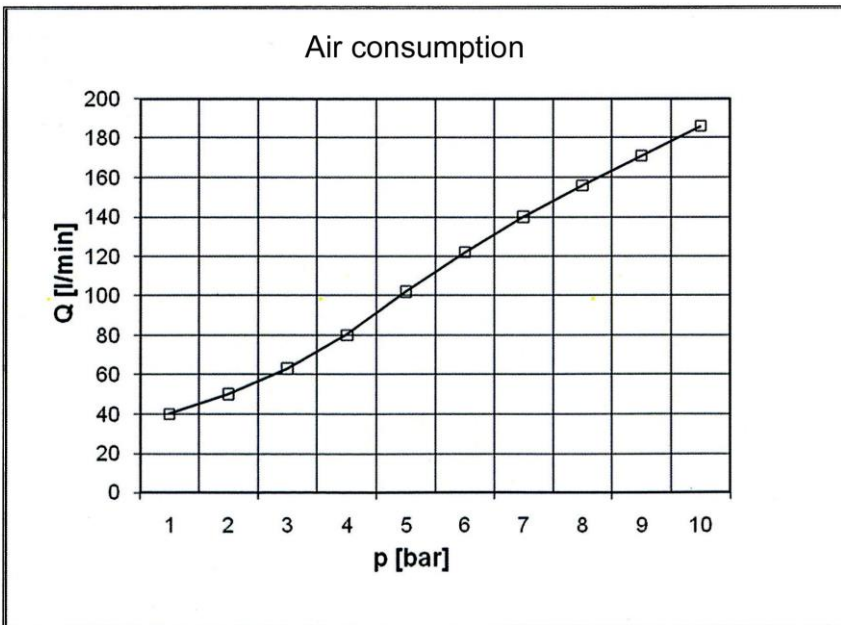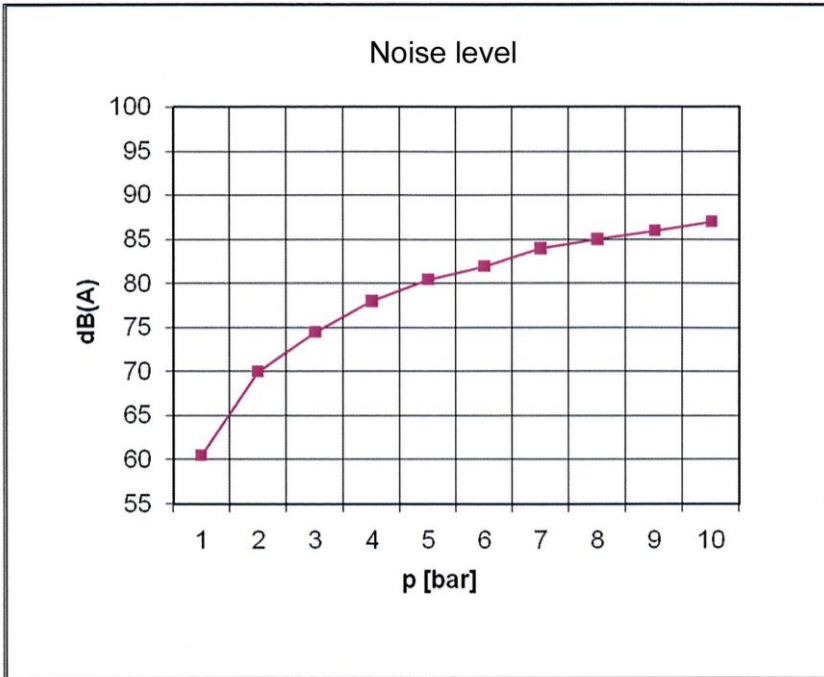

Flow rates for Standard nozzles Art.-No. 105/5:

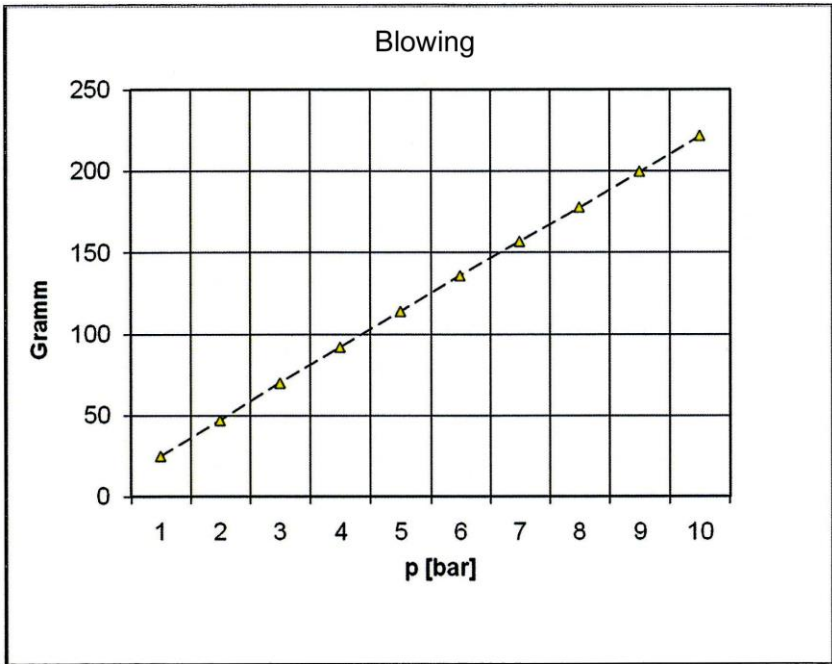

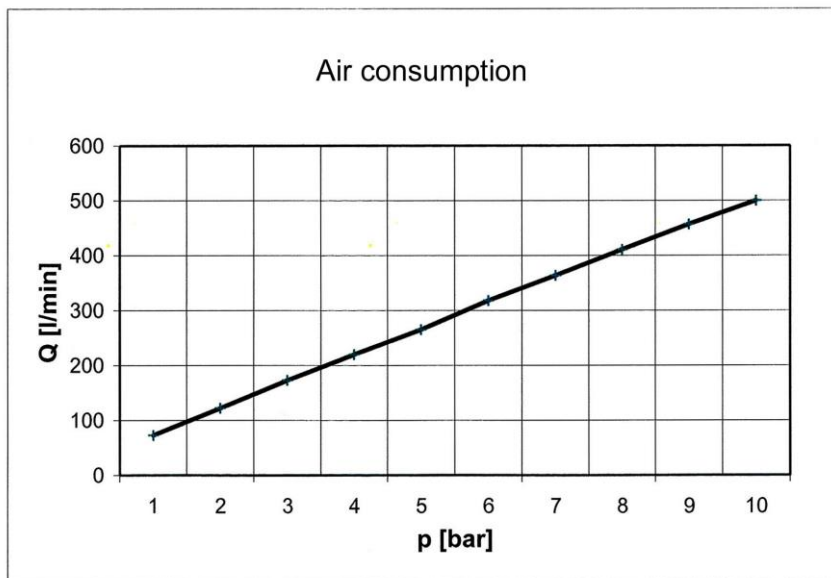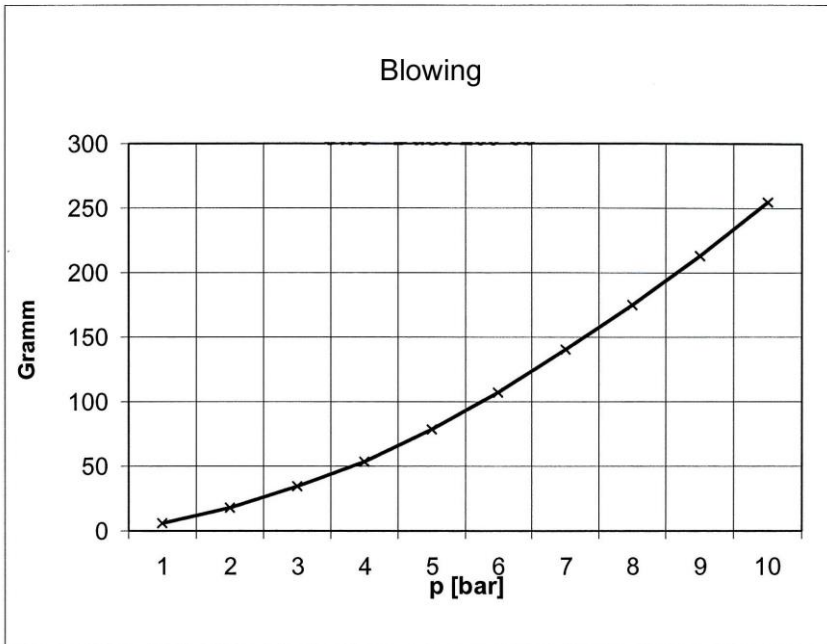Flow rates for Silencer nozzles Art. No. 114345

For the Nozzle with chip shield **Art. No. 114346** there no flow rate measurements.
Therefore we have no values available.