


Straight-way type, full passage.


Housing	Brass
Valve disc	Stainless steel
Sealant	NBR
Pin	Brass
Spring	Stainless steel
Min. opening pressure	0.01 – 0.03 bar
Operating temperature	-20 °C to 100 °C
Standard thread	G thread acc. to DIN EN ISO 228-1



Unidirectional valve						
Art. No.	Type No.	Thread	Operating pressure max. bar	a/f mm	H mm	Ø B mm
103881	9227.31	G 3/8	25	23	55.0	34.5
103882	9227.32	G 1/2	25	27	58.5	34.5
103883	9227.33	G 3/4	25	33	65.0	41.5
103884	9227.34	G 1	25	40	74.5	48.0
103885	9227.35	G 1 1/4	18	50	83.0	60.5
103886	9227.36	G 1 1/2	18	55	93.0	71.0
103887	9227.37	G 2	18	70	101.0	87.0
134874	9227.38	G 2 1/2	12	87	122.0	120.0
134875	9227.39	G 3	12	101	141.5	140.0




9227.32

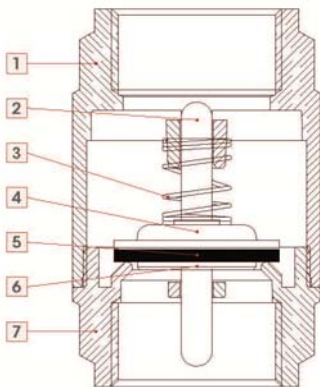

Pos.	DESCRIZIONE / DESCRIPTION	Qt.	MATERIALE / MATERIAL
1	Corpo / Body	1	Ottone / Brass CW617N
2	Perno / Pin	1	Ottone / Brass CW614N
3	Molla / Spring	1	Acciaio inox / Stainless steel AISI 302
4	Tenuta / Plate	1	Acciaio inox / Stainless steel AISI 304
5	Guarnizione / Washer	1	NBR
6	Tappo / Plug	1	Ottone / Brass CW614N
7	Manicotto / End adapter	1	Ottone / Brass CW617N

FLOW RATE AND PRESSURE DROP CHART WITH WATER

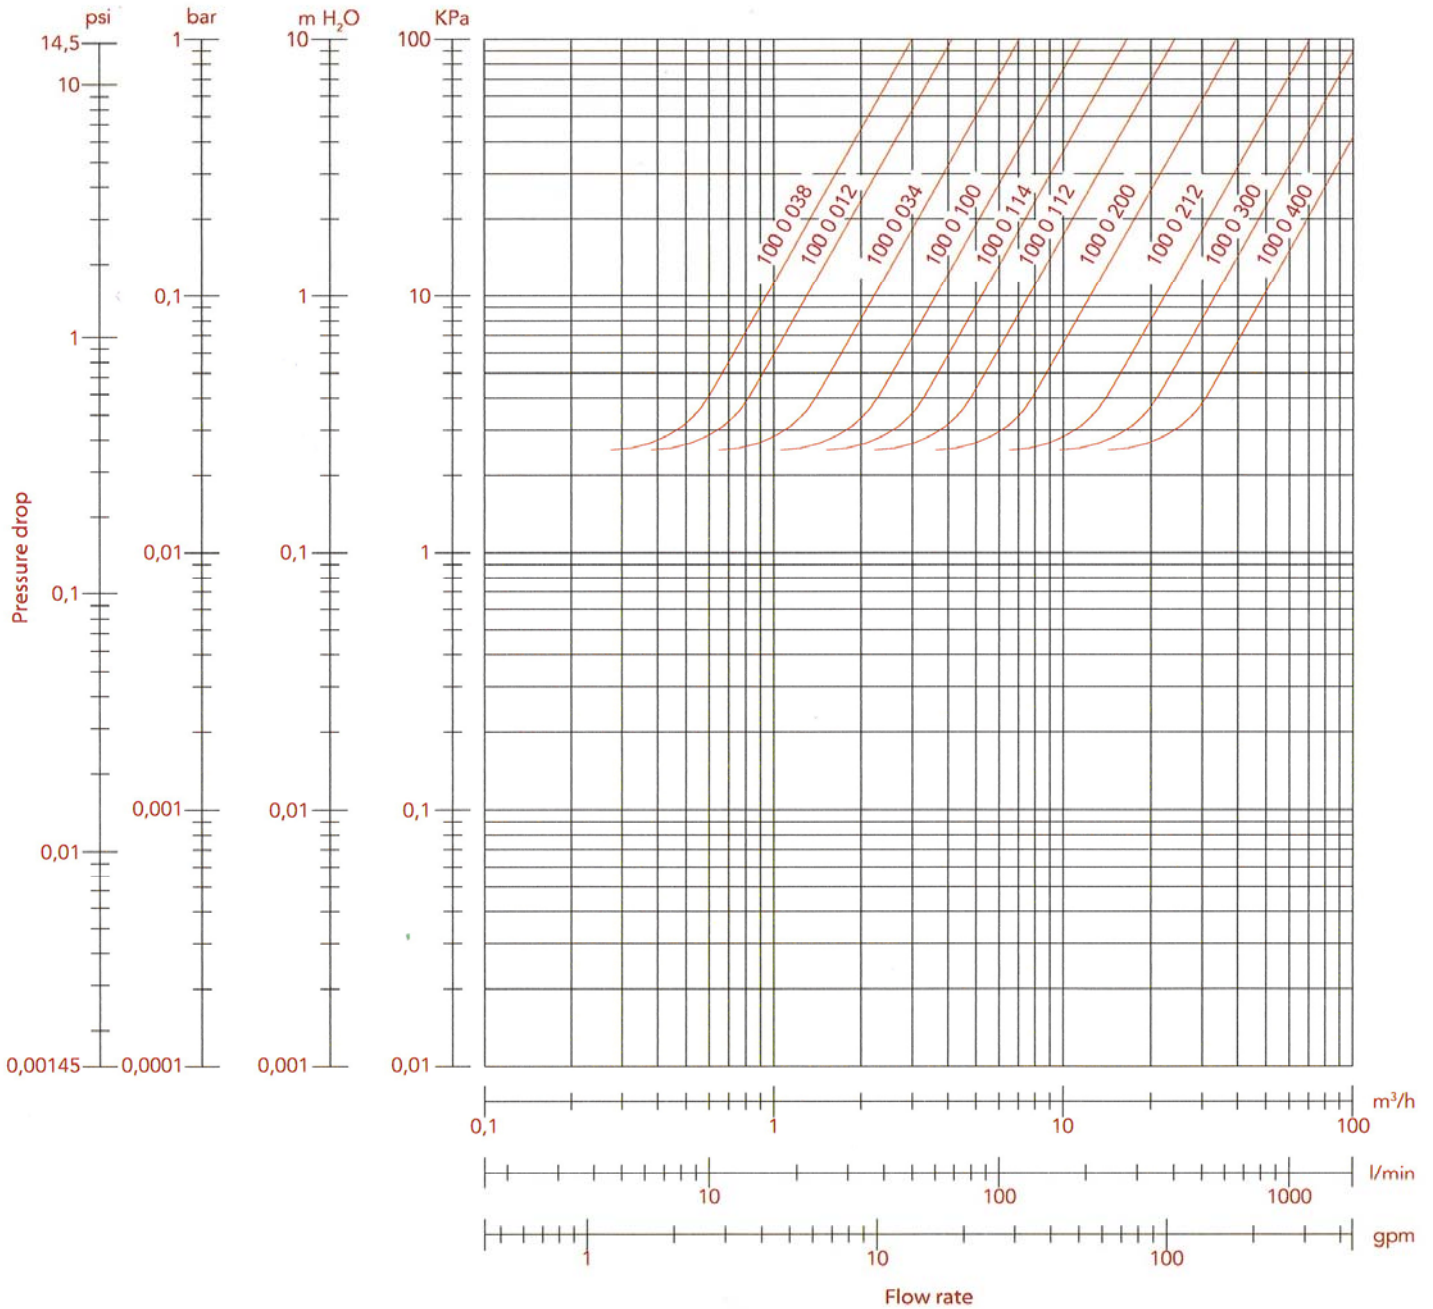

SIZE	3/8"	1/2"	3/4"	1"	1"1/4	1"1/2	2"	2"1/2	3"	4"
Kv	2,99	4,12	7,03	11,45	16,54	24,12	39,32	70,64	105,60	155,30

DIAGRAM MINIMUM PRESSURE TO GET THE VALVES OPENING

