



Acc. to DIN EN 331 - with DIN DVGW approval for gas applications.

Ball valves with full bore, for gas installations. Applications: Natural gas, LPG, town gas.

Housing	Nickel-plated brass
Ball	Chrome-plated brass
Ball seal	PTFE
Stem seal	PTFE / NBR (Rp 1/4), PTFE / EPDM / HNBR (up to Rp 3/8)
Hand lever	Aluminium
Butterfly handle	Aluminium
Operating temperature	-15 °C to 60 °C gas
Operating pressure	max. 5 bar (pressure class MOP 5 acc. to DIN EN 331)
Thread material	Brass
Standard thread	Thread acc. to ISO 7-1

Ball valve with hand lever, DIN DVGW for gas, female/female thread

Art. No.	Type No.	Thread	DN	L mm	A mm	B mm
133169	350.1101	Rp 1/4	8	45.7	85.0	42.0
133170	350.1102	Rp 3/8	10	48.6	85.0	41.7
133171	350.1103	Rp 1/2	15	61.1	85.0	46.0
133172	350.1104	Rp 3/4	20	69.6	105.0	53.0
133173	350.1105	Rp 1	25	83.5	105.0	57.0
133174	350.1106	Rp 1 1/4	32	96.8	130.0	70.0
133175	350.1107	Rp 1 1/2	40	107.7	130.0	76.0
133176	350.1108	Rp 2	50	129.8	165.0	92.0

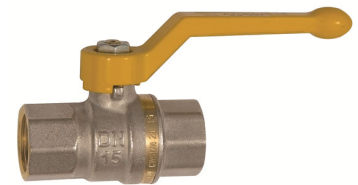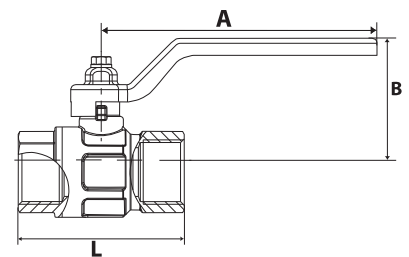

350.1103

Ball valve with hand lever, DIN DVGW for gas, female/male thread


Art. No.	Type No.	Thread	DN	L mm	A mm	B mm
133179	350.1111	Rp/R 1/4	8	51.4	85.0	42.0
133180	350.1112	Rp/R 3/8	10	53.6	85.0	41.7
133181	350.1113	Rp/R 1/2	15	67.0	85.0	46.0
133182	350.1114	Rp/R 3/4	20	78.0	105.0	53.0
133183	350.1115	Rp/R 1	25	89.0	105.0	57.0
133184	350.1116	Rp/R 1 1/4	32	103.0	130.0	70.0
133185	350.1117	Rp/R 1 1/2	40	113.0	130.0	76.0
133186	350.1118	Rp/R 2	50	134.5	165.0	92.0




350.1113

Ball valve with butterfly handle, DIN DVGW for gas, female/female thread

Art. No.	Type No.	Thread	DN	L mm	A mm	B mm
133187	350.1121	Rp 1/4	8	45.7	47.0	30.0
133188	350.1122	Rp 3/8	10	48.6	47.0	30.6
133189	350.1123	Rp 1/2	15	61.1	47.0	36.0
133190	350.1124	Rp 3/4	20	69.6	56.0	42.0
133191	350.1125	Rp 1	25	83.5	56.0	46.0




350.1123



Ball valve with butterfly handle, DIN DVGW for gas, female/male thread

Art. No.	Type No.	Thread	DN	L mm	A mm	B mm
133192	350.1131	Rp/R 1/4	8	51.4	47.0	31.0
133193	350.1132	Rp/R 3/8	10	53.6	47.0	30.6
133194	350.1133	Rp/R 1/2	15	67.0	47.0	36.0
133195	350.1134	Rp/R 3/4	20	78.0	56.0	42.0
133196	350.1135	Rp/R 1	25	89.0	56.0	46.0



350.1133

→ Regardless of the PN 63 bar or PN 40 bar operating pressure marked on the device, the ball valve may only be used up to max. 5 bar for gas applications.