

»FUTURA« series



Input pressure	0.4 - 16 bar
Temperature range	-10 °C to 50 °C
Medium	Compressed air, neutral gases
Housing	PA66 GF60
Sealant	NBR
Connecting thread	Material: Die-cast zinc
Flow rate measurement	At $P_2 = 6$ bar and pressure drop $\Delta p = 1$ bar

Non-return valve


Art. No.	Type No.	Thread	Size	Flow rate l/min
156654	FU 9401	G 1/4	1	1250
156655	FU 9402	G 3/8	1	1250

Accessories / spare parts


Art. No.	Type No.	Description
100038	H 850	Mounting bracket, incl. 2 screws
100039	WK 100	Wall bracket, incl. 2 screws
100040	KP 100	Joiner set, incl. 2 screws
135851	WK 101-14	Wall bracket with connection thread G 1/4
135852	WK 101-38	Wall bracket with connection thread G 3/8

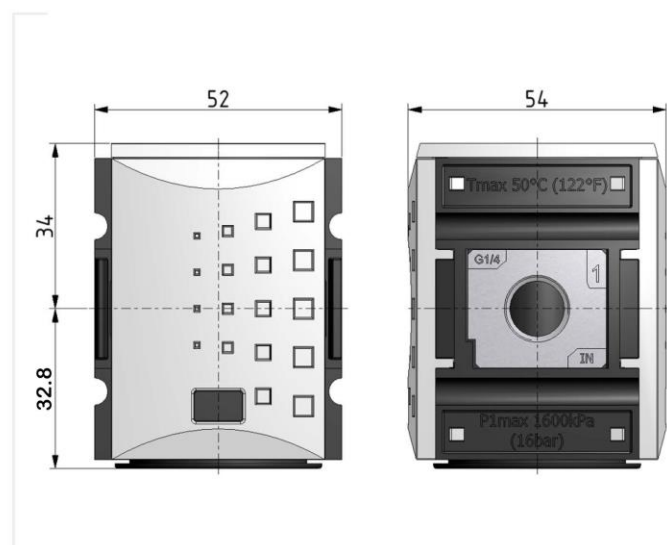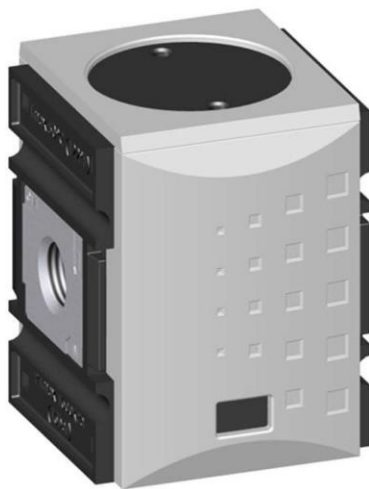

flow characteristic 1

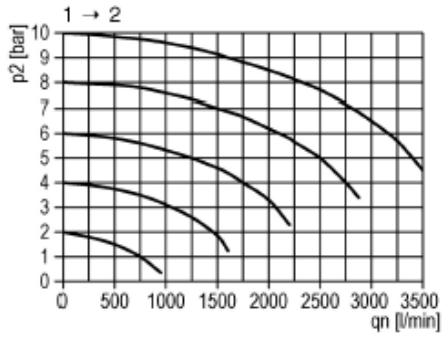

flow characteristic 2

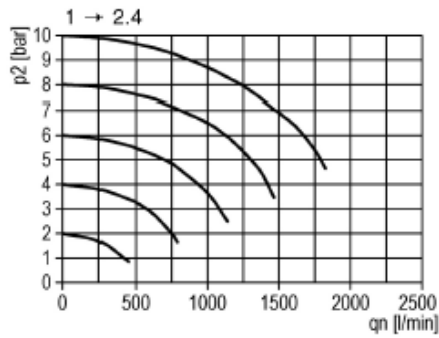

symbol

