


Characteristics

Туре	VN 22	VN 23
Connection	G 1/4	G 3/8
Type of construction	Proportional oil-mist lubricator	
Input pressure p ₁	max. 16 bar with plastic tank max. 20 bar with metal tank	
Mounting position Mounting type	Vertical, metering unit on top Holder (device rear)	
Medium temperature Ambient temperature	max. 50 °C	
Oil grade	DIN 51524 – ISO	VG 32
Lubricator function (start of delivery)	From 50 I/min	
Effective tank capacity	max. 50 cm³	
Oil filling	Manual, during or	peration
Weight [g]	300	

Ordering information



X = S X = M Bowl guard Metal bowl

Order example: VN 22 M

Description

- Block design
- Flow direction indicated by arrows on front plate
- >M< type: Metal metering unit included

Materials

Part	Material
Head piece (housing)	Z 410
O-ring	NBR
Drip attachment (metering unit)	PA
Plastic tank	Polycarbonate
Front plates	ABS


Accessories

Fixing bracket	VZ 718
Plastic tank	VZ 601
Metal tank	VZ 651

Compressed Air Conditioning



Dimensions [mm]

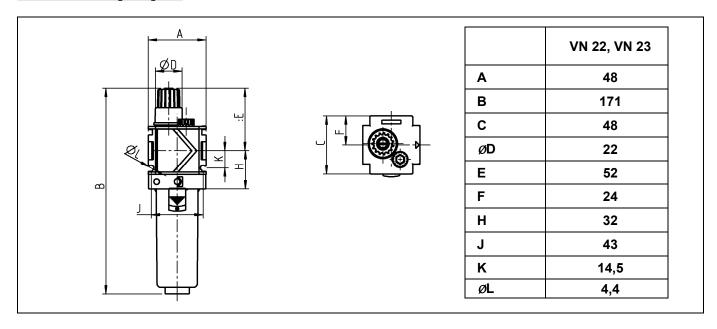


VN 22 VN 23


Main spare parts

Part	Part No.
Drip attachment	
- Plastic	VZ 721
- Metal	VZ 731

Flow rates

		VN 22	VN 23
Nominal flow p₂ 6 bar / ∆ 1 bar	QN [l/min]	3400	4400





© Riegler 4--16





Interlocking / mounting

Variobloc

Size 1 G 1/4

Fixing bracket and fixing nut	630/1-B
Fixing bracket and two screws	VZ 718
Compact connecting set	VZ 101
Compact conn. set, incl. tee holder	VZ 201
Comfort connecting set	VZ 401

Size 1 G 3/8

Fixing bracket and fixing nut	630/1-B
Fixing bracket and two screws	VZ 718
Compact connecting set	VZ 102
Compact conn. set, incl. tee holder	VZ 202
Comfort connecting set	VZ 402

Size 2 G 1/2

Fixing bracket and fixing nut	
Fixing bracket and two screws	
Compact connecting set	
Compact conn. set, incl. tee holder	
Comfort connecting set	

Size 2 G 3/4

Fixing bracket and fixing nut	
Fixing bracket and two screws	
Compact connecting set	
Compact conn. set, incl. tee holder	
Comfort connecting set	

