
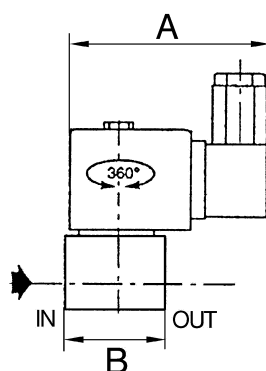


3/2-way type - normally closed - stainless steel.

Housing	Stainless steel 1.4401
Internal parts	Stainless steel
Valve disc	Stainless steel 1.4401
Sealant	FPM
Electrical connection	for connector socket PG 11 P, acc. to DIN 4400
Function	NC
Protection IP	IP 65 (with connector socket fitted)
Medium temperature	-10 °C to 100 °C
Ambient temperature	-10 °C to 60 °C
DN	1.2



MV18ES24

Solenoid valve, normally closed, directly operated

Art. No.	Type No.	Thread	Voltage	Operating pressure min. / max. bar	A mm	B mm
158094	MV18ES24	G 1/8	24 V DC	0 / 15	60.5	33.0
158093	MV18ES230	G 1/8	230 V AC, 50 - 60 Hz	0 / 15	60.5	33.0