


Service units -Futura-





Description

- Service unit as a pre-assembled combination of individual service units in the "Futura" series
 "KP300" or "WK 103" joiner set for seamless integration with other devices

Characteristics

Туре	FU 625	FU 637	FU 626	FU 638
Port ISO 228	G 3/4 (semi)	G 3/4 (auto)	G 1 (semi)	G 1 (auto)
Type of construction	- Centrifugal filter, sintered filter element 5 μm - Diaphragm pressure regulator with self-relieving design - Proportional oil-mist lubricator, refilling under pressure			
Medium	Compressed air, neutral gases			
Mounting position	Vertical, bowl at bottom			
Control ranges	0.1 to 1 bar / 0.1 to 2 bar / 0.2 to 4 bar / 0.5 to 8 bar / 0.5 to 10 bar / 0.5 to 16 bar			
Internal air consumption	max. 1.5 l/min (depending on secondary pressure)			
Temperature Medium / ambient	Max. 50°C			
Input pressure Pin - With automatic / semi-automatic drain - With manual drain	Min. 1.5 bar / max. 16 bar Max. 16 bar			
Filter rating	Pore size 5 μm			
Bowl capacity	Filter regulator 87 cm³ / lubricator 181 cm³			
Condensate drain	Semi-automatic – pressureless exhaust (semi) / fully automatic (auto)			
Drip rate / qv = 1000l/min	1 to 2 drops / min (recommended value)			
Oil grade	CL 32 acc. to DIN 51517 - ISO VG 32			
Weight	2620 kg (semi) / 2680 kg (auto)			
Mounting type	Bracket, wall mounting			

Materials

Part	Material	
Head piece	IXEF1022®	
Diaphragm	Brass-NBR-PA6	
Valve cone	Brass-NBR	
Bowl (filter / lubricator)	Polycarbonate	
Bowl guard	Polyamide	
Metal bowl (filter / lubricator)	Die-cast zinc	
Sight dome	Polycarbonate	
O-ring 55 x 2.5	NBR70	
Filter element	Cellpor (polyethylene)	
Threaded plates	Die-cast zinc Z 410	

Ordering information

- The service units are delivered in single packs
- Pressure gauge included

Service units -Futura-




Accessories

Designation	Art. No.
Mounting bracket, incl. screws	H 854
Joiner set with wall bracket	WK 103
Joiner set	KP 300
Polycarbonate bowl with bowl guard / filter	BSF 34
Polycarb. bowl with bowl guard / lubricator	BSL 34
Polycarb. bowl with fully autom. drain valve	BSF 34-A
Metal bowl / filter	MF 34
Metal bowl / lubricator	ML 34
Metal bowl with fully automatic drain valve	MF 34-A
Panel nut M50 x 1.5	R 33-55

Spare parts


Designation	Art. No.
Seal kit for pressure regulator	22.71110.4
Filter element 5 µm	6141.6.905
Sight dome	901.7.990
O-ring 55 x 2.5	5525.4.9

Dimensions

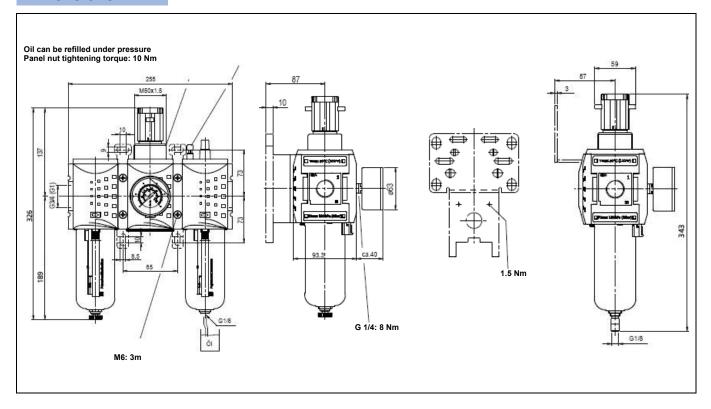


Flow rates

Flow characteristic



Hysteresis



Lubricator operating limit

