


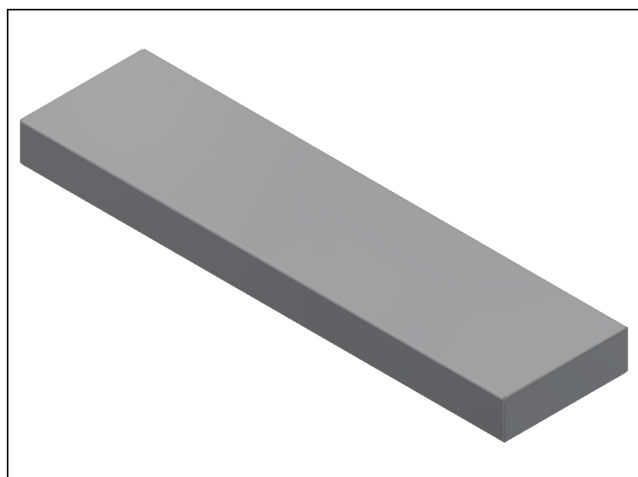

Magnetic rails

HRA-F-077x24-AB-0300-B-B

SKU: TBAB030002

Product Features

Description	Magnetic rail
SKU	TBAB030002
Product key	HRA-F-077x24-AB-0300-B-B
Specific application	For smooth transfer from magnetic to non-magnetic conveyance,For dry conditions
Interface/connection dim's	Threaded hole M8 (2x)
Material housing	AISI304 (SS 1.4301),S235JRC+C (St 1.0122)
Surface treatment/finishing	Painted
Colour	Red (Traffic red): RAL3020
Min./max. ambient temperature	-20 to 100 °C
Magnetic system	Permanent ferrite magnet,Weakening outfeed
Magnet quality	Ferrite GSFD-33, anisotropic, Br 4100 gauss (at 20 °C), Tmax. 225 °C
Magnet field strength (flux density) (±10%)	1750 gauss
Length	300 mm
Width	77 mm
Height	24 mm
Weight	1.8 kg
Water-resistant	no
Type	Weakening outfeed

Visit our website for specifications, drawings, documentation, accessories, spare parts and more

<https://www.goudsmitmagnets.com/solutions/magnetic-handling/magnets-transport-cans/magnetic-rails.html?sku=TBAB030002>