


REV	BY	DATE	DESCRIPTION
-	PW	29.12.2016	New Vault, nothing changed, old ref.: H06_000000



INSTALLATION DETAILS:

- ANGLE MAXIMAL 30°
- JUNCTION BOX ON TOP

YES

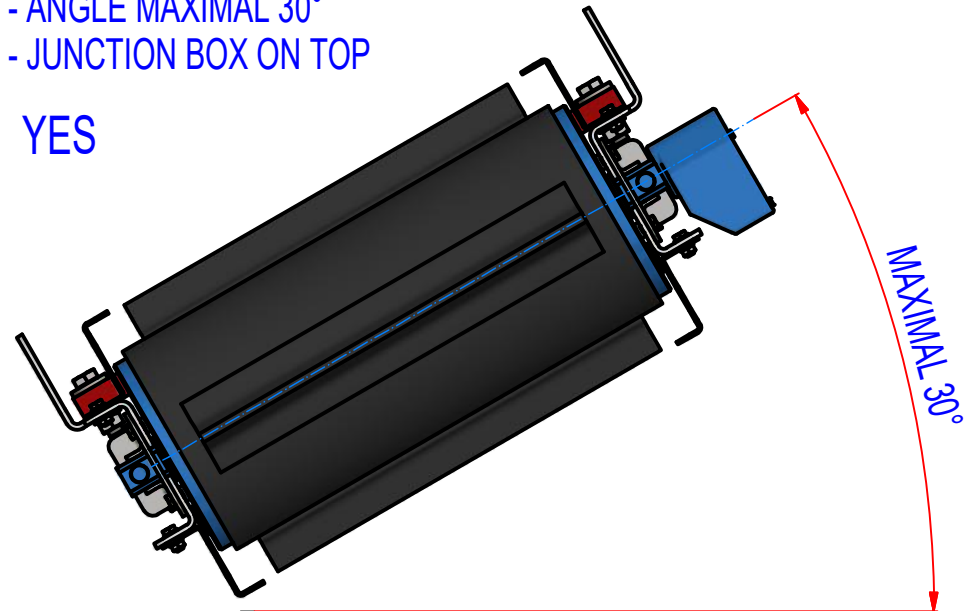

NO

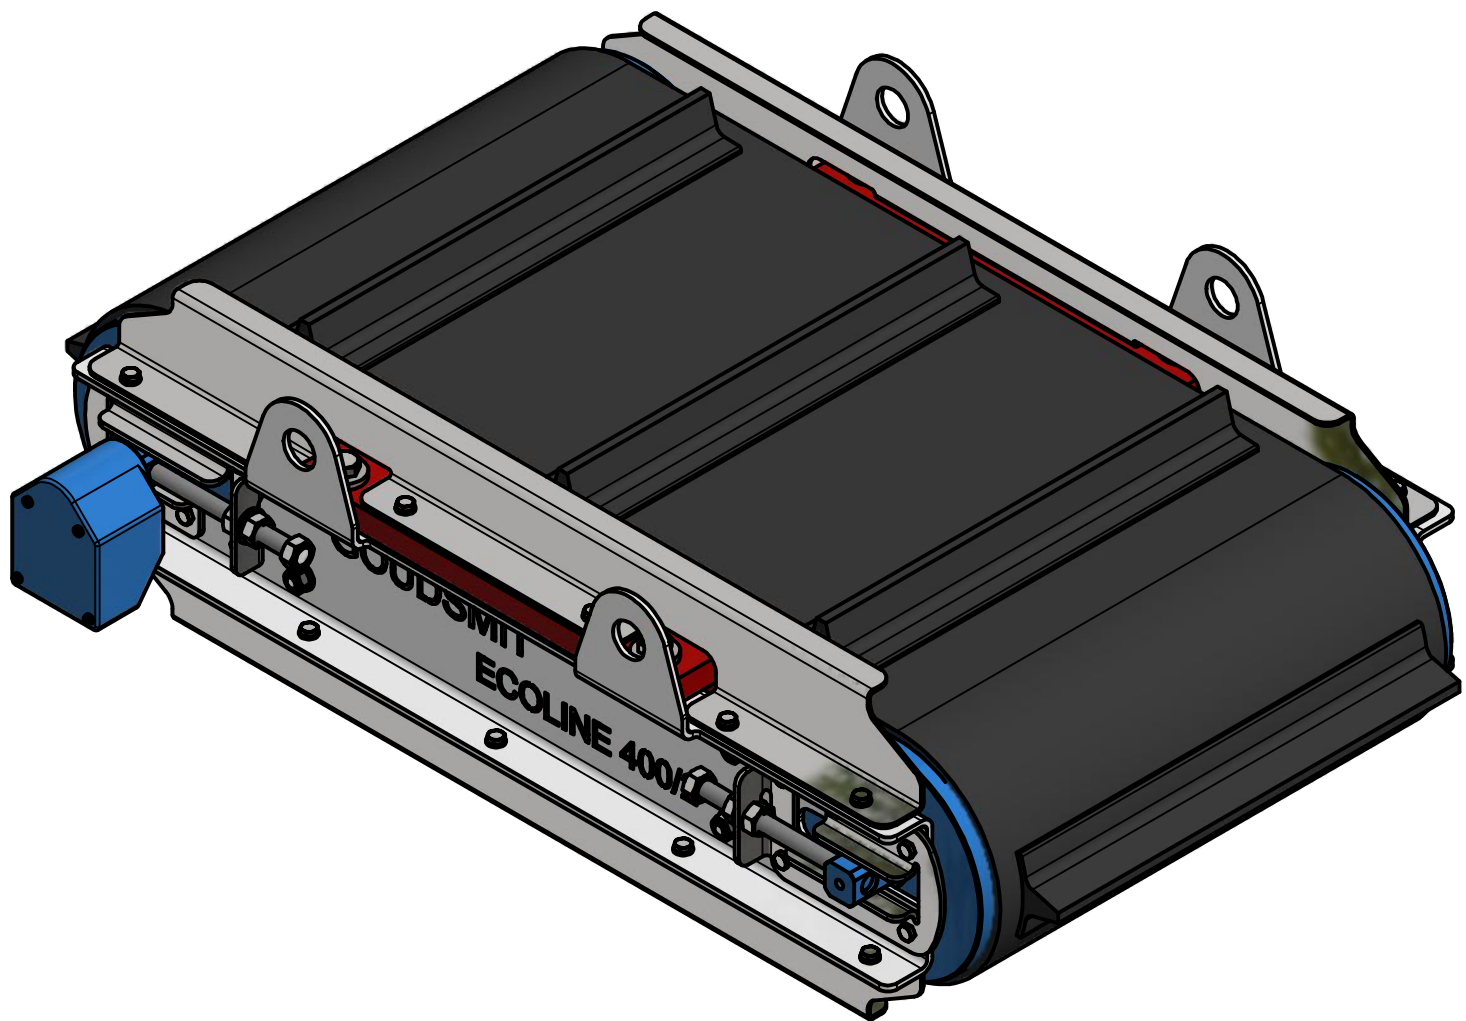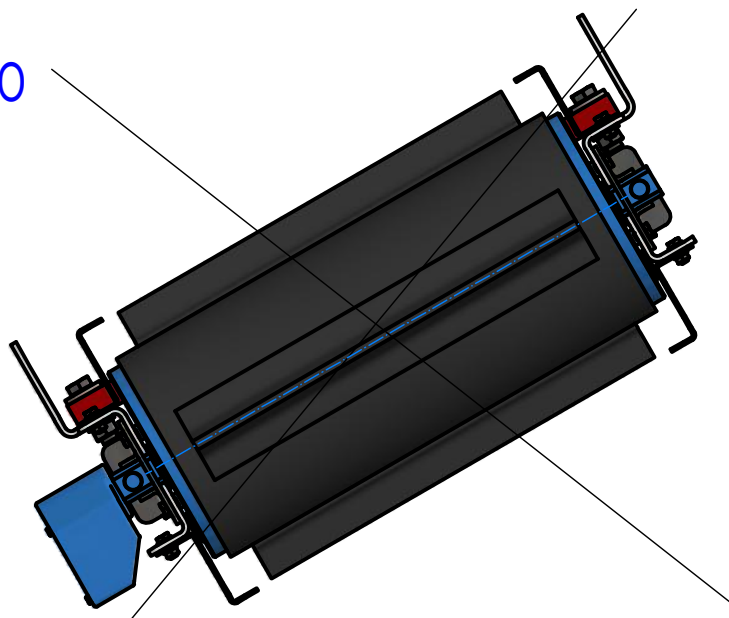

DRIVE ROLLER : P=1,5 kW; I=4,7A; v=1,7 m/s; 3x230/400V-50Hz
BELT : EP 400/3 4+2 Y, LENGHT 2310, WIDTH 500, 6 RIBS T40/20x450
BELT SPEED 1,7 m/s

1	A007_000000	Overbelt magnet, permanent, ECO LINE 400, ferrite	374,4
POZ./POS.	Č. SOUČÁSTI/ PART NUMBER	POPIS / DESCRIPTION	HMOT./ WEIGHT
	Sheet: A2	Extra info:	General tolerance: ISO 2768 - cL
Drawn: PW	Weight (kg): 374,4		Drawn according: ISO268; ISO1101; ISO2553
Date: 29.12.2016			Status:
Predecessor:			Customer reference number:
Quick search: ECO LINE 400/2			Product key: ROP-F1-C-050-M-D-L-B-B-NA
Description: Overbelt magnet, permanent, ECO LINE 400, ferrite		© All rights reserved. Reproduction is not permitted without written permission of GOUDSMIT Magnetic Systems BV	Part number: SAPB040520
			Rev: -