

200m Mini Altimeter Kit Smart™ Sensor

200m Mini Altimeter Kit Smart™ Sensor

The 200m Mini Altimeter Kit is an ultra-compact altimeter kit designed for measuring height off the sea floor and underwater structures. Rated for up to 1,000 meters, the 200m Mini Altimeter delivers 99.4% accuracy at full 200 meter range with output resolution to 1 cm. The 200m Mini Altimeter delivers excellent performance from a small, lightweight configuration optimized for use on USVs and AUVs. The sensor is available in either 170 kHz or 200 kHz. With low power consumption of just 150 mA at 12 V, the 200m Mini Altimeter is perfect for power-limited vessels. Optional water temp sensor available.

In full auto mode, the sounding rate is variable with depth; in manual mode, the sounding rate is configurable to run up to 10X per second. The data output rate and ping rate are the same in manual mode, and one ping produces one depth output. In full auto mode, the data output rate is configurable (0.1 to 25 seconds per interval). The 200m Mini Altimeter communicates NMEA 0183 serial data protocol over RS232 or RS422.

The kits consist of a 1,000 m rated transducer with 15.5" (39.4 cm) cable with connector, matching bulkhead connector, transceiver board with mounting hardware, and wiring diagram. Water temp sensor optional.

FEATURES

- Offered in 170 kHz or 200 kHz models
- Designed for AUVs, USVs and ROVs
- Ultra-compact and lightweight design
- Minimal power consumption
- Made in the USA
- NMEA 0183 serial data over RS232 or RS422




Sue Bennett Phone: +1-603-249-7199
Email: sbennett@airmar.com

When performance matters most we've got you covered.




DIMENSIONS

Circuit Board

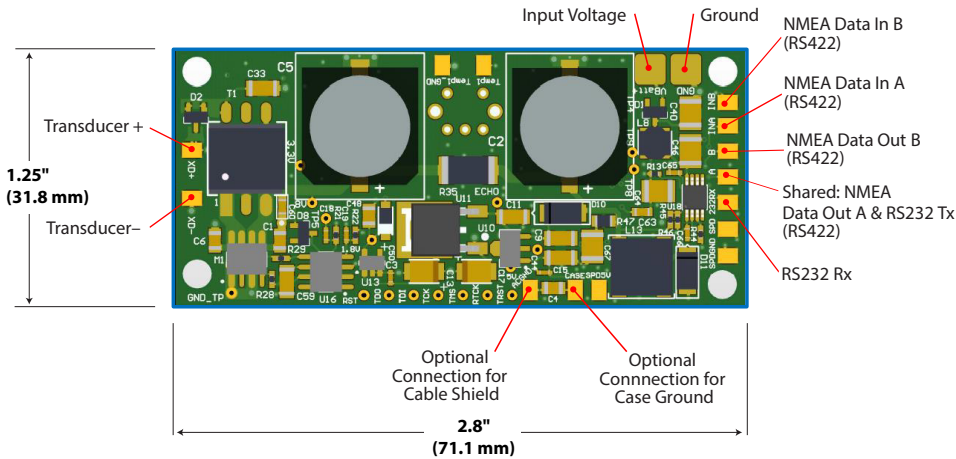

Transducer

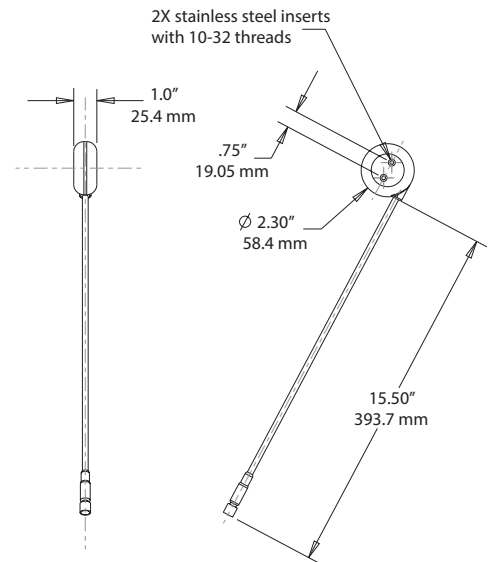

SPECIFICATIONS

NMEA 0183* Standard Output Sentences

Power output from transmitter:	100 W
Reverse polarity protection:	Yes
Power supply voltage:	9 – 40 VDC, Regulated
Average current draw:	150 mA @ 12 V
NMEA 0183 Baud Rate:	4800 (Default)
Full Auto mode data output rate:	From 0.1 to 25 sec/interval
Manual mode:	Output rate equal to ping rate
Flash reprogrammability:	Using boot loader with encryption
Operating temperature range:	-5°C to +60°C
Storage temperature range:	-30°C to +70°C
Beam Angle:	170 kHz-C: 18° at -3dB 200 kHz-A: 14° at -3dB
Minimum depth reading:	0.4 m, limited in manual mode
Maximum depth reading:	200 m, limited in manual mode
Depth display resolution:	1 cm
Depth accuracy:	99.4% at full range (see accuracy table for more info)
Transducer housing depth rated to:	1000 m
Housing type:	M107
Cable length:	15.5"
Connector:	3-pin female
Transducer weight:	5 oz/140 g
Sounding rate:	In full auto mode, sounding rate is variable with depth, in manual mode, sounding rate is configurable up to 10 times per second. Data output rate and ping rate are the same in manual mode, one ping produces one depth output. In full auto mode, data output rate is configurable (0.1 to 25 seconds per interval)

*NMEA 0183 is a serial data bus standard communications protocol that permits different types of electronic equipment to communicate. For more information visit www.nmea.org.

ACCURACY (Based on tank testing)			
Actual	Reported	Difference	%
3.05 m	3.07 m	+0.02 m	99.33%
4.57 m	4.59 m	+0.02 m	99.56%
5.79 m	5.82 m	+0.03 m	99.48%

Note: A minimum test tank of 50 gallons is recommended as smaller tanks may induce reverberation and interfere with measurements.

© 2020 AIRMAR Technology Corporation.

MiniAlt_rF 06/26/20

As AIRMAR constantly improves its products, all specifications are subject to change without notice. All AIRMAR products are designed to provide high levels of accuracy and reliability, however they should only be used as aids to navigation and not as a replacement for traditional navigation aids and techniques. Smart™ Sensors is a trademark of AIRMAR Technology Corporation. Other company or product names mentioned in this document may be trademarks or registered trademarks of their respective companies, which are not affiliated with AIRMAR.



www.airmar.com



AIRMAR
TECHNOLOGY CORPORATION