


AT Pulleys, Pitch 5 mm Made from Aluminium

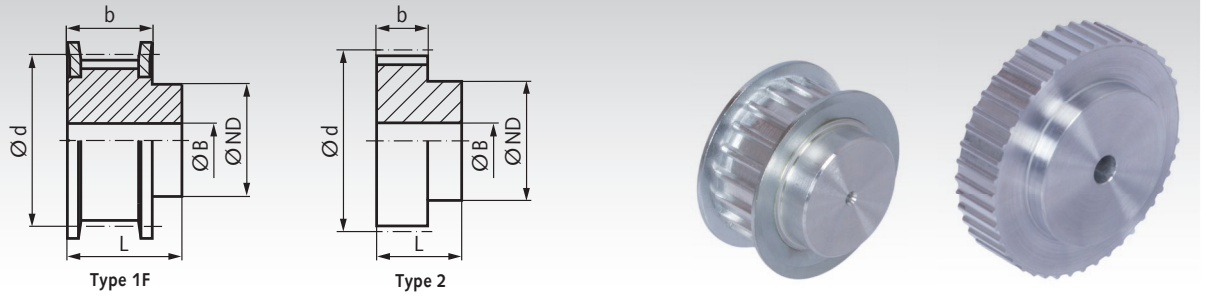

Material: Aluminium similar to EN AW2017A. Flanges zinc-plated steel.

Ordering Details: e.g.: Product No. 166 412 00, Pulley, Pitch AT5, 12 Teeth, Timing Belt Width 25 mm

Profile AT 5, Timing Belt Width 25 mm

Product No. Belt Width 25 mm	Type	Number of teeth	Type	Outside Ø			ND mm	b mm	L mm	Pilot Hole B mm	Weight g
				Pulley mm	Flange mm	d mm					
166 412 00	36 AT5/12-2	12	1F	17,88	23	19,10	10	30	36	-	30
166 414 00	36 AT5/14-2	14	1F	21,06	25	22,28	13	30	36	-	40
166 415 00	36 AT5/15-2	15	1F	22,65	28	23,87	16	30	36	-	40
166 416 00	36 AT5/16-2	16	1F	24,24	32	25,46	18	30	36	-	50
166 417 00	36 AT5/17-2	17	1F	25,84	32	27,06	18	30	36	-	55
166 418 00	36 AT5/18-2	18	1F	27,43	32	28,65	20	30	36	-	60
166 419 00	36 AT5/19-2	19	1F	29,02	36	30,24	22	30	36	-	70
166 420 00	36 AT5/20-2	20	1F	30,61	36	31,83	23	30	36	-	80
166 422 00	36 AT5/22-2	22	1F	33,79	38	35,01	24	30	36	-	80
166 424 00	36 AT5/24-2	24	1F	36,98	42	38,20	26	30	36	8	110
166 425 00	36 AT5/25-2	25	1F	38,57	44	39,79	26	30	36	8	120
166 426 00	36 AT5/26-2	26	1F	40,16	44	41,38	26	30	36	8	120
166 427 00	36 AT5/27-2	27	1F	41,75	48	42,97	30	30	36	8	130
166 428 00	36 AT5/28-2	28	1F	43,34	48	44,56	32	30	36	8	140
166 430 00	36 AT5/30-2	30	1F	46,53	51	47,75	34	30	36	8	150
166 432 00	36 AT5/32-2	32	1F	49,71	54	50,93	38	30	36	8	180
166 436 00	36 AT5/36-2	36	1F	56,08	64	57,30	38	30	36	8	230
166 440 00	36 AT5/40-2	40	1F	62,44	66	63,66	40	30	36	8	280
166 442 00	36 AT5/42-2	42	1F	65,63	71	66,85	40	30	36	8	290
166 444 00	36 AT5/44-0	44	2	68,81	-	70,03	45	30	36	8	310
166 448 00	36 AT5/48-0	48	2	75,17	-	76,39	50	30	36	8	400
166 460 00	36 AT5/60-0	60	2	94,27	-	95,49	65	30	36	8	610
166 472 00	36 AT5/72-0	72	2	113,37	-	114,59	80	30	36	10	
166 484 00	36 AT5/84-0	84	2	132,47	-	133,69	80	30	36	10	
166 496 00	36 AT5/96-0	96	2	151,57	-	152,79	90	30	36	10	

Profile AT 5, Timing Belt Width 32 mm

Product No. Belt Width 32 mm	Type	Number of teeth	Type	Outside Ø			ND mm	b mm	L mm	Pilot Hole B mm	Weight g
				Pulley mm	Flange mm	d mm					
166 512 00	46 AT5/12-2	12	1F	17,88	23	19,10	10	40	46	-	42
166 514 00	46 AT5/14-2	14	1F	21,06	25	22,28	13	40	46	-	49
166 515 00	46 AT5/15-2	15	1F	22,65	28	23,87	16	40	46	-	55
166 516 00	46 AT5/16-2	16	1F	24,24	32	25,46	18	40	46	-	66
166 517 00	46 AT5/17-2	17	1F	25,84	32	27,06	18	40	46	-	74
166 518 00	46 AT5/18-2	18	1F	27,43	32	28,65	20	40	46	-	81
166 519 00	46 AT5/19-2	19	1F	29,02	36	30,24	22	40	46	-	93
166 520 00	46 AT5/20-2	20	1F	30,61	36	31,83	23	40	46	-	100
166 522 00	46 AT5/22-2	22	1F	33,79	38	35,01	24	40	46	-	102
166 524 00	46 AT5/24-2	24	1F	36,98	42	38,20	26	40	46	8	144
166 525 00	46 AT5/25-2	25	1F	38,57	44	39,79	26	40	46	8	153
166 526 00	46 AT5/26-2	26	1F	40,16	44	41,38	26	40	46	8	161
166 527 00	46 AT5/27-2	27	1F	41,75	48	42,97	30	40	46	8	170
166 528 00	46 AT5/28-2	28	1F	43,34	48	44,56	32	40	46	8	174
166 530 00	46 AT5/30-2	30	1F	46,53	51	47,75	34	40	46	8	198
166 532 00	46 AT5/32-2	32	1F	49,71	54	50,93	38	40	46	8	232
166 536 00	46 AT5/36-2	36	1F	56,08	64	57,30	38	40	46	8	302
166 540 00	46 AT5/40-2	40	1F	62,44	66	63,66	40	40	46	8	365
166 542 00	46 AT5/42-2	42	1F	65,63	71	66,85	40	40	46	8	387
166 544 00	46 AT5/44-0	44	2	68,81	-	70,03	45	40	46	8	431
166 548 00	46 AT5/48-0	48	2	75,17	-	76,39	50	40	46	8	529
166 560 00	46 AT5/60-0	60	2	94,27	-	95,49	65	40	46	8	813
166 572 00	46 AT5/72-0	72	2	113,37	-	114,59	80	40	46	10	