


Accessories For Worm Gear Screw Jacks

Bellows FB (Standard Version) Material: Molerit TH 59 for Worm Gear Screw Jacks Version A + B

Bellows protect the spindles against dirt and reduce the danger of accidents.
Not yet available for size 0.

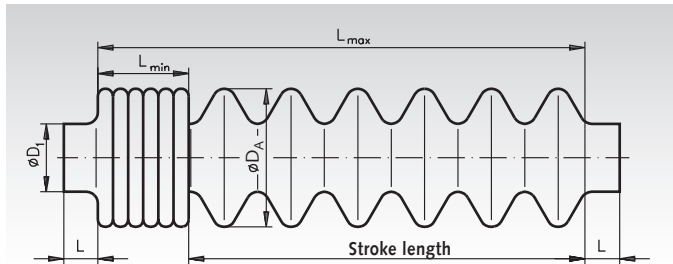

The product number is only required if the bellows is to be delivered separately (not on the gear unit).

Product No.	Size	D ₁ mm	D _A mm	L mm	L _{min} mm	L _{max} mm	max. stroke ¹⁾ mm	Spindle length extension ²⁾ mm	Weight kg
475 001 10	1	30	61	10	40	215	175	36	0,1
475 002 10	2	39	80	15	80	420	340	66	0,1
475 003 10	3	46	90	15	70	420	350	40	0,2
475 004 10	4	60	116	15	120	750	630	120	0,8

¹⁾ For other stroke lengths on request. Alternatively with coil spring cover.

²⁾ With other stroke lengths the dimensions change! Extension has to be calculated for the dimensions C₃ Page 802.

End Switches ES-2 with Roller Push Rod

Optional Accessories for Worm Gear Screw Jacks. For end position switching off. Mounting for screw jacks version A and B in protective tube. Special versions of protective tube and spindle are required for this. The end switches have to be ordered together with the jack.

Ordering Details: e.g.: Worm Gear Screw Jack Type ... with two end switches ES-2 mounted in the protective tube.



Dimensions: Overall length x width x height = 111 x 31 x 33mm.
NC and NO contacts switch simultaneously.

Minimum operating rate 0.01m/s.


Fastening threads M18.

Wiring M20x1.5

Protection class IP65.

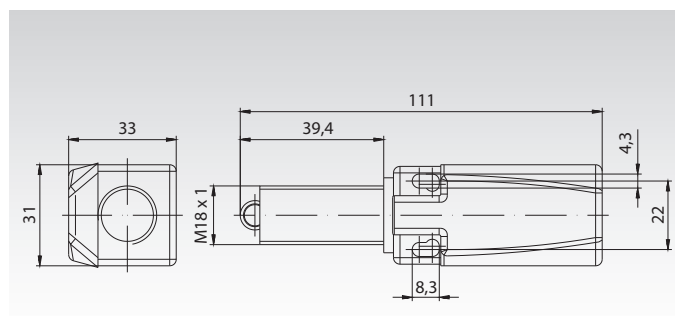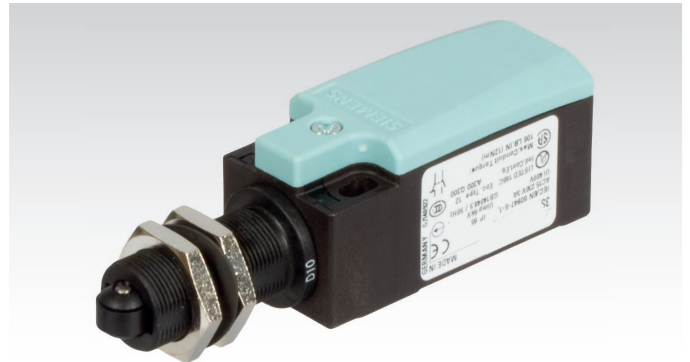

Attachment Schematic

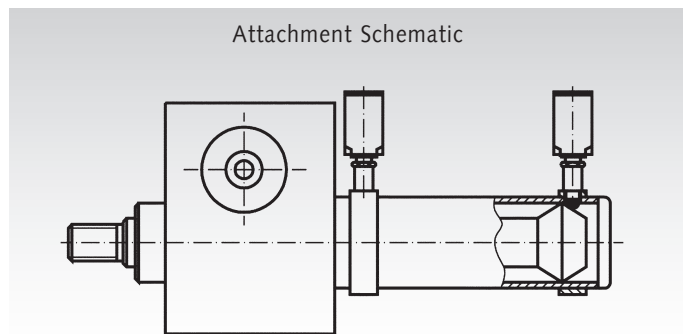

Connecting Shafts Page 806



Frequency Inverters
Page 744

