


Internal Tab Washers DIN 462 for Slotted Round Nuts DIN 1804, Steel

Material: Steel, bright.

Lockwashers (safety plates) for locknuts DIN 1804.

A keyway is required on the shaft thread.

After adjusting or fastening the nut, the sheet edge must be beaded into one slot of the nut.

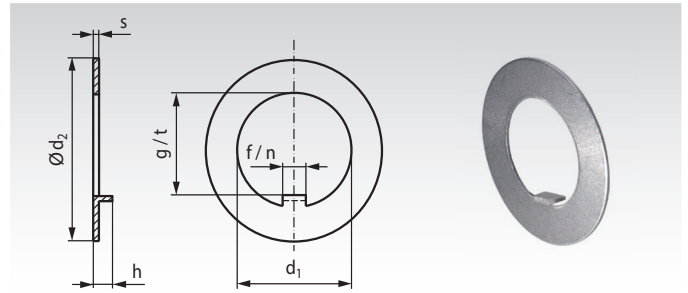

Ordering Details: e.g.: Product No. 652 608 01, Internal tab washer 8 DIN 462

Product No.	matching to DIN 1804	d ₁ ^{H11} mm	d ₂ ^{h11} mm	s mm	f ^{c11} mm	g ^{H11} mm	h mm	shaft keyway		Weight g
								n ^{H11} mm	t max. mm	
652 608 01	M8x1	8	20	0,8	3	5,9	2,5	3	5,8	2
652 610 01	M10x1	10	25	0,8	4	7,4	3	4	7,3	3
652 614 01	M14x1,5	14	30	0,8	5	11,4	3	5	11,3	3
652 616 01	M16x1,5	16	32	1,0	5	13,5	3	5	13,4	4
652 618 01	M18x1,5	18	34	1,0	6	15,4	4	6	15,3	4
652 620 01	M20x1,5	20	36	1,0	6	17,5	4	6	17,4	4
652 622 01	M22x1,5	22	40	1,0	6	19,5	4	6	19,4	5
652 624 01	M24x1,5	24	42	1,0	6	21,6	4	6	21,5	7
652 628 01	M28x1,5	28	50	1,0	7	25,5	5	7	25,4	8
652 630 01	M30x1,5	30	50	1,2	7	27,5	5	7	27,4	8
652 632 01	M32x1,5	32	52	1,2	7	29,6	5	7	29,5	9
652 635 01	M35x1,5	35	55	1,2	7	32,6	5	7	32,5	9
652 638 01	M38x1,5	38	58	1,2	8	35,3	5	8	35,2	12
652 640 01	M40x1,5	40	62	1,2	8	37,3	5	8	37,2	14
652 642 01	M42x1,5	42	62	1,2	8	39,3	5	8	39,2	13
652 645 01	M45x1,5	45	68	1,2	8	42,4	5	8	42,2	17
652 648 01	M48x1,5	48	75	1,2	8	45,4	5	8	45,2	21
652 650 01	M50x1,5	50	75	1,2	8	47,4	5	8	47,2	20
652 652 01	M52x1,5	52	80	1,2	10	49,3	6	10	49,1	23
652 655 01	M55x1,5	55	80	1,2	10	52,3	6	10	52,1	22
652 658 01	M58x1,5	58	90	1,5	10	55,3	6	10	55,1	30
652 660 01	M60x1,5	60	90	1,5	10	57,3	6	10	57,1	29
652 662 01	M62x1,5	62	95	1,5	10	59,3	6	10	59,1	33
652 665 01	M65x1,5	65	95	1,5	10	62,4	6	10	62,2	30
652 670 01	M70x1,5	70	100	1,5	10	67,4	6	10	67,2	35
652 672 01	M72x1,5	72	110	1,5	10	68,9	7	10	68,7	65
652 675 01	M75x1,5	75	110	1,5	10	71,9	7	10	71,7	61
652 680 01	M80x2	80	115	1,5	10	76,9	7	10	76,7	64
652 685 01	M85x2	85	120	1,5	10	81,9	7	10	81,7	67
652 695 01	M95x2	95	135	1,5	12	91,8	8	12	91,6	87
652 699 01	M100x2	100	145	1,5	12	96,9	8	12	96,7	103