


Splined Hubs - DIN ISO 14

Material: Steel C45Pb, from diameter 80 C45, red brass (CuSn7Zn4Pb7-C).
Stainless steel, Material-No. 1.4305


© A/d up to size 18 x 22 = 0.15 mm, above 0.2 mm.

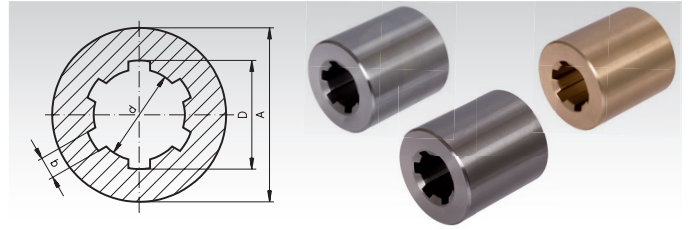

Ordering Details: e.g.: Product No. 648 302 00, Splined Hub DIN 14, KN 11 x 14

| Product No. C45 | Product No. Rg7 | Product No. Stainless Steel | Profile Description mm | Number of keyways | Ø D ^{H11} mm | Ø d ^{H7} mm | b ^{D9} mm | DIN ISO 2768 m Ø A mm | Length mm | Weight Steel kg | Weight Rg7 kg |
|-----------------|-----------------|-----------------------------|------------------------|-------------------|-----------------------|----------------------|--------------------|-----------------------|-----------|-----------------|---------------|
| 648 302 00 | 648 352 00 | 648 993 02 | KN 11 x 14 | 6 | 14 | 11 | 3 | 20 | 40 | 0,06 | 0,08 |
| 648 304 00 | 648 354 00 | 648 993 04 | KN 13 x 16 | 6 | 16 | 13 | 3,5 | 28 | 45 | 0,16 | 0,18 |
| 648 305 00 | 648 355 00 | 648 993 05 | KN 16 x 20 | 6 | 20 | 16 | 4 | 32 | 45 | 0,20 | 0,22 |
| 648 301 00 | 648 351 00 | 648 993 01 | KN 18 x 22 | 6 | 22 | 18 | 5 | 40 | 50 | 0,27 | 0,3 |
| 648 306 00 | 648 356 00 | 648 993 06 | KN 21 x 25 | 6 | 25 | 21 | 5 | 40 | 55 | 0,36 | 0,42 |
| 648 303 00 | 648 353 00 | 648 993 03 | KN 23 x 28 | 6 | 28 | 23 | 6 | 50 | 55 | 0,47 | 0,54 |
| 648 307 00 | 648 357 00 | 648 993 07 | KN 26 x 32 | 6 | 32 | 26 | 6 | 52 | 60 | 0,70 | 0,78 |
| 648 309 00 | 648 359 00 | 648 993 09 | KN 28 x 34 | 6 | 34 | 28 | 7 | 60 | 60 | 0,76 | 0,87 |
| 648 308 00 | 648 358 00 | 648 993 08 | KN 32 x 38 | 8 | 38 | 32 | 6 | 60 | 60 | 0,88 | 1,00 |
| 648 312 00 | 648 362 00 | 648 993 12 | KN 36 x 42 | 8 | 42 | 36 | 7 | 70 | 65 | 1,08 | 1,23 |
| 648 310 00 | 648 360 00 | 648 993 10 | KN 42 x 48 | 8 | 48 | 42 | 8 | 65 | 70 | 0,94 | 1,10 |
| 648 311 00 | 648 361 00 | 648 993 11 | KN 42 x 48 | 8 | 48 | 42 | 8 | 80 | 70 | 1,88 | 2,16 |
| 648 314 00 | 648 364 00 | 648 993 14 | KN 46 x 54 | 8 | 54 | 46 | 9 | 80 | 90 | 2,25 | 2,49 |

Collars
page 570



Reworking within 24h-service possible. Custom made parts on request.